




R3100C

Lepton³

25dBm 1-Port
RAIN RFID Reader Module

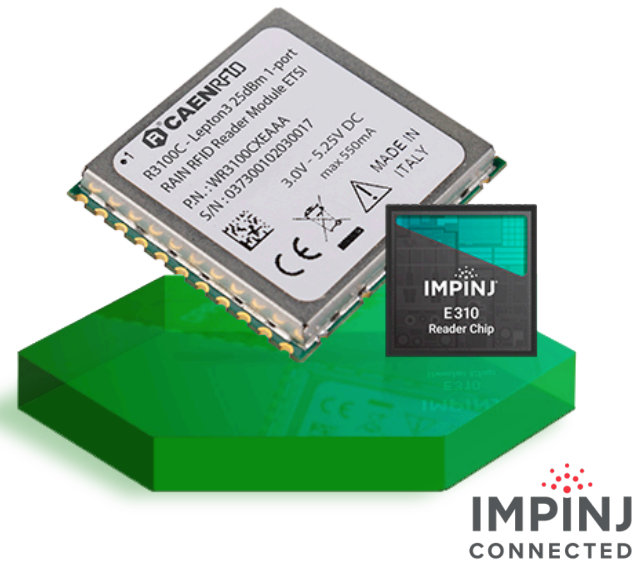

BENEFITS	Ultra compact size	High Sensitivity	Surface mount device (SMD)	IOIO Serial interface
----------	--------------------	------------------	----------------------------	-----------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316mW) output power
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves

Overview

The **Lepton³** (Model R3100C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 10dBm to 25dBm, the reader can detect tags at more than 2 mt of distance (depending on antenna and tag dimensions).

Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device and the surface mount technology allow to embed the **Lepton³** inside the new small form factor industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³** is pin-to-pin compatible with the **Impinj RS1000** and **RS500** modules making it a perfect replacement for these devices.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none"> • 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.1.1) • 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 10 dBm to 25 dBm (from 10 mW to 316 mW) conducted power
RX Sensitivity	<ul style="list-style-type: none"> • -72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output • -68 dBm - 1%PER, assuming 10 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	50 Ohm mono-static RF port on a single pin
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none"> • 4 channels (compliant to ETSI EN 302 208 v. 3.1.1) • 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none"> • UART Serial Port: <ul style="list-style-type: none"> • Baudrate from 9.6 to 921.6 kbps, default 115.2 kbps • Databits: 8 • Stopbit: 1 • Parity: none • Flow control: none • 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none"> • 4 I/O lines 3.3 V level • Iout = 8 mA max.
Power Supply	3.0 to 5.25 V DC
Power Consumption	<ul style="list-style-type: none"> • 550 mA @ 5 V - RF out = 25 dBm • 10 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none"> • (W)29 x (L)32 x (H)3.8 mm³ • 1.14 x 1.26 x 0.15 inches³
Package Type	32 pin surface mount module (SMT compatible)
Operating Temperature	-20°C to +70°C
Weight	4.6 g.

Ordering Options

WR3100CXAAAA	Lepton3 - 30dBm Reader Module
WRHML37XEVBX	R1271, R3100, R7100 eval. board



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com