



CATALOG 2025



Gateways to digital

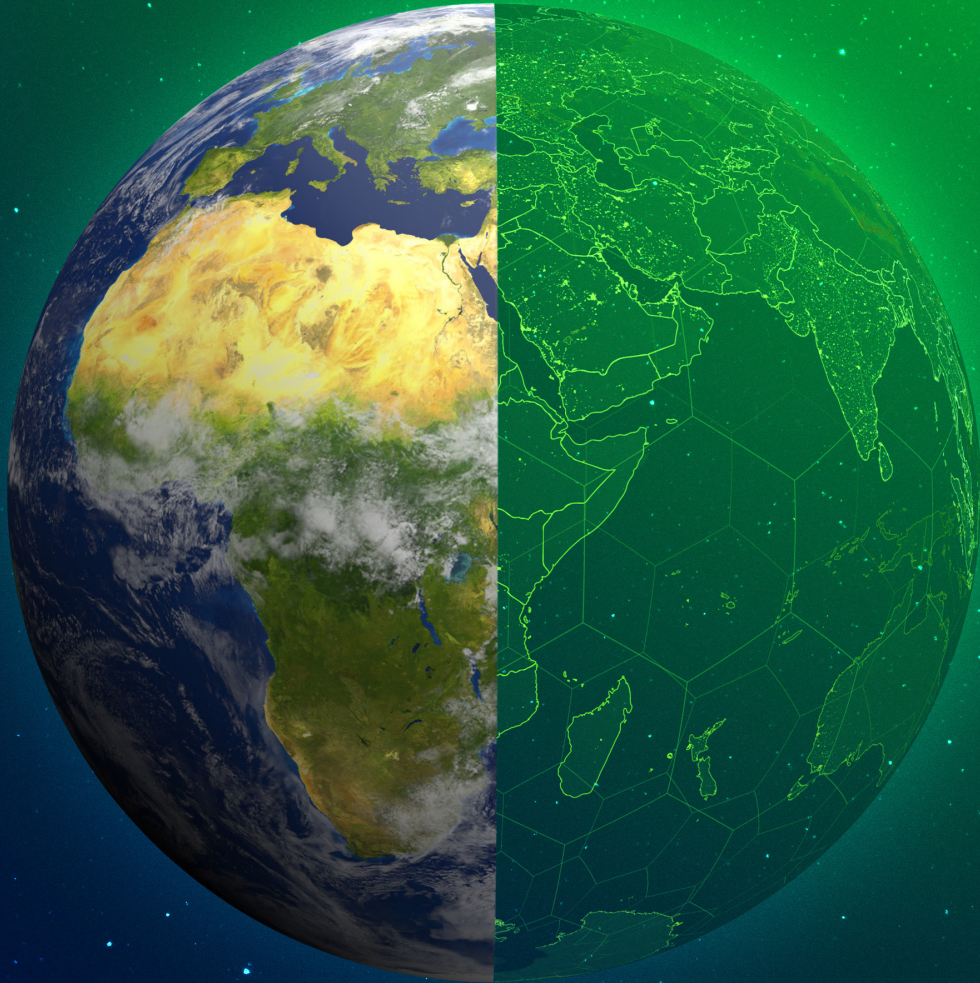

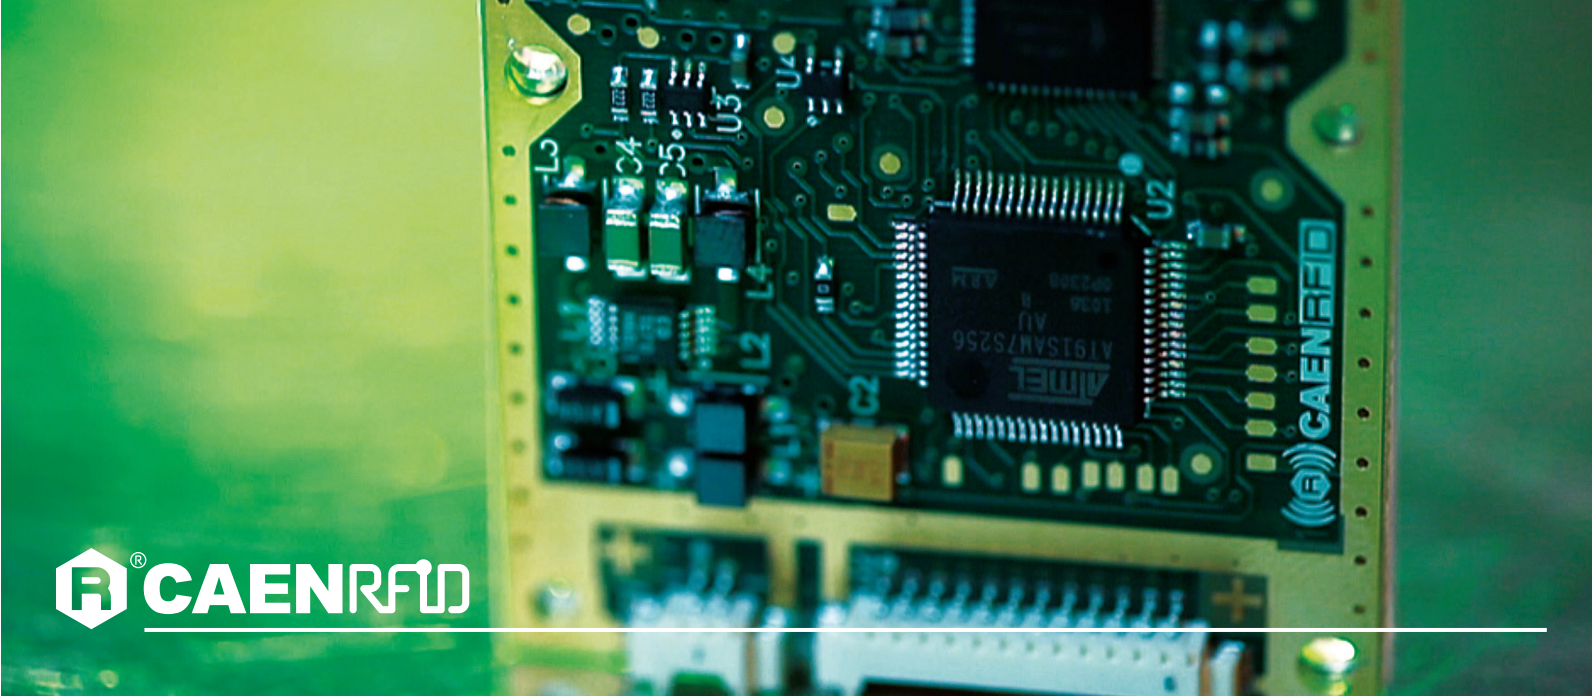

Company Profile

Our History

CAEN RFID is a leading company in Automatic Identification (AutoID) and it has focused its activities in the **RAIN RFID** technology (passive UHF RFID conforming to GS1 EPC Class1 Gen2 or ISO 18000-63 standards).

RAIN RFID is a wireless technology that connects billions of everyday items to the internet, enabling businesses and consumers to identify, locate, authenticate, and engage each item. Read/write operations on tagged items can occur without line-of-sight, at longer distance and faster speed compared to other passive technologies, thus allowing a cheaper and more efficient process automation.

CAEN RFID has developed its products according to the **RAIN RFID** standards. Our team of engineers designs state-of-the-art devices and provides continuous support and feedback to customers. This provides our customers with a better understanding of **RAIN RFID** technology and our products, enabling their use in a more efficient and performing way.

The quality of our products, the consultancy service at the time of purchase and the after-sales support are among our top priority objectives.

The most promising fields in which RFID can provide a quick Return on Investment (ROI) span from Retail, to Pharma and Food, Waste Management, Security and Access Control, Industrial Manufacturing and Logistics. **CAEN RFID** provide the technology and the technical support to enable the development of best in class **RAIN RFID** solutions.

CAEN RFID was founded in 2006 as a private-owned Italian company, but its activities started in 2003 as the RFID division of **CAEN SpA**. It has been the first European company to design, produce and market an UHF RFID reader. It is a partner of the most important associations, including EPCglobal and ETSI, participating to the definition of the standards.

The Management, Technical and Commercial teams are young, dynamic and greatly experienced with everyday RFID applications. All our staff has been previously involved in the experience within **CAEN SpA**, world leader in electronic instrumentation for Nuclear and Particle Physics. **CAEN SpA** electronics is always at the forefront of technology and has become a “de facto” standard in the most important Physics labs around the world.

In 2012 **CAEN RFID** obtained the ISO9001:2008 Quality Certification. This award has driven the company to supply products and services of great quality to our customers, who we consider our greatest asset.

In 2015 **DATALOGIC** became a shareholder of **CAEN RFID** through the acquisition of the 20% of the company with the purpose of company development and growth.



ISO9001:2015
Certified Company



We are proud of the high quality of our products.

ISO 9001

ISO 9001:2015 approved quality system ensures all our internal processes.

From R&D to the registration of the incoming purchase orders, through:

- Resource Planning
- Scheduling
- Production

Our quality system is responsible for the proper functioning of all our internal processes and is subject to regularly unannounced audits,carried out by the National Standards Authority.

From the initial product design and its development stages, to the delivery of the production batches, we follow documented procedures that cover every aspect of our business. The auditing of our procedures by an independent third party guarantees that our business runs smoothly and efficiently.

The quality of CAEN RFID srl products is constantly monitored by the application of the UNI EN ISO 9001:2015 standard. CAEN RFID srl is ISO 9001 certified since 2012.



Mobile Readers

Mobile Readers

Reading RAIN RFID labels and tags in mobility is a need for a number of markets: retail, transport and logistics, healthcare, maintenance, manufacturing, event management just to mention a few.

Mobile workers normally use devices like tablets and smartphones and prefer to use them in their everyday activities.

CAEN RFID mobile readers connect easily to smartphones, tablets and PCs using the Bluetooth technology, providing mobile RAIN RFID technology to everyone.



R1307I

fIDo

RAIN RFID Sled Reader



BENEFITS

High Performance reading

Flexible

USB Type C

HID

Bluetooth

Wireless charge

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- ETSI and FCC versions available
- Bluetooth/BLE communication
- Integrated circular polarized antenna
- Ergonomic form factor
- Battery powered
- iPhone/iPad compatibility
- SP-Connect™ universal mounting for smartphones
- Embedded smartphone wireless charger
- Optional barcode scanner

Applications

- RAIN RFID add-on to smartphones, tablets and mobile terminals
- Shop inventory and cycle counting
- Asset tracking
- Warehouse management
- Mobile workers

Overview

fIDo (Model R1307I) is a RAIN RFID sled reader of the easy2read® product line with integrated antenna for long range applications.

The reader hosts an internal 5200mAh rechargeable battery that provides excellent operating time. The embedded wireless charging transmitter permits to charge the smartphone when the **fIDo** is connected to the power supply without the needs to detach it from the reader.

Thanks to the Bluetooth® communication interface, the **fIDo** is a perfect add-on for any Bluetooth® enabled host such as a PC, a smartphone, a PDA or a tablet for RAIN RFID readings. The reader is compatible with Windows, Android and iOS operating systems.

The device supports both Bluetooth Low Energy (BLE) and Bluetooth classic communication to provide the maximum usage flexibility, including the HID profile for keyboard emulation.

fIDo integrate a SP-Connect SPC+ mounting adapter to easily fix a wide range of smartphones with dedicated phone cases.

fIDo is ideal for inventory management, mobile workers, service and maintenance applications, asset tracking and many other AutoID applications.

The radio frequency core of the reader is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1) (Mod. R1307IE)• 902÷928 MHz (FCC part 15.247) (Mod. R1307IU)
RF Power	<ul style="list-style-type: none">• Configurable from 1 dBm ERP to 28 dBm ERP (Mod. R1307IE)• Configurable from 3 dBm EIRP to 30 dBm EIRP (Mod. R1307IU)
RX Sensitivity	<ul style="list-style-type: none">• -85 dBm - 10%PER @ 30 dBm output
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1) (Mod. R1307IE)• 50 hopping channels (compliant to FCC part 15.247) (Mod. R1307IU)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Antenna Gain	3.0 dBic (typical)
Antenna Polarization	Integrated Circular Polarized Antenna
Read Range	Up to 10.0 m
USB Interface	USB 2.0 Full Speed (12 Mbit/s) via USB Type-C connector
Bluetooth Interface	<ul style="list-style-type: none">• Bluetooth 4.2 Smart Ready compliant• 11 dBm EIRP output power BR• 5 dBm EIRP output power EDR• 7 dBm EIRP output power BLE• HID and Serial over GATT (BLE)• HID and SPP profiles (Bluetooth classic)
User Interface	<ul style="list-style-type: none">• Power and Trigger buttons• Power and battery status LED• Communication and operation result LED• Bi-tonal buzzer and vibration element for event signaling
Battery Type	Li-Ion 3.7 V, 5200 mAh
Battery Life	<ul style="list-style-type: none">• Operating: > 12 h (with 100,000 tag readings)• Standby: > 50 days (powered off, no LED blinking)
Battery Charging Time	<ul style="list-style-type: none">• 4 hours with 5V 3A AC/DC power supply (with Wireless Charger TX disabled)• 6 hours with 5V 3A AC/DC power supply (with Wireless Charger TX enabled)
Wireless Charger	Transmitter power 5W
IP Rating	IP65
Dimensions	<ul style="list-style-type: none">• 151 x 150 x 72 mm³• 5.9 x 5.9 x 2.8 inches³
Operating Temperature	-10 °C to +55 °C
Weight	374 g (w/o barcode) - 386 g (with barcode)
USB Cable Length	1.5 m

Ordering Options

WR1307IXEUAA	fIDo - RAIN RFID sled reader - ETSI		
WR1307IXUSAA	fIDo - RAIN RFID sled reader - FCC		
WR1307IBXEUA	fIDo - sled reader with barcode - ETSI		
WR1307IBXUSA	fIDo - sled reader with barcode - FCC		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R1280I

skID

Mini Sled RAIN RFID Reader

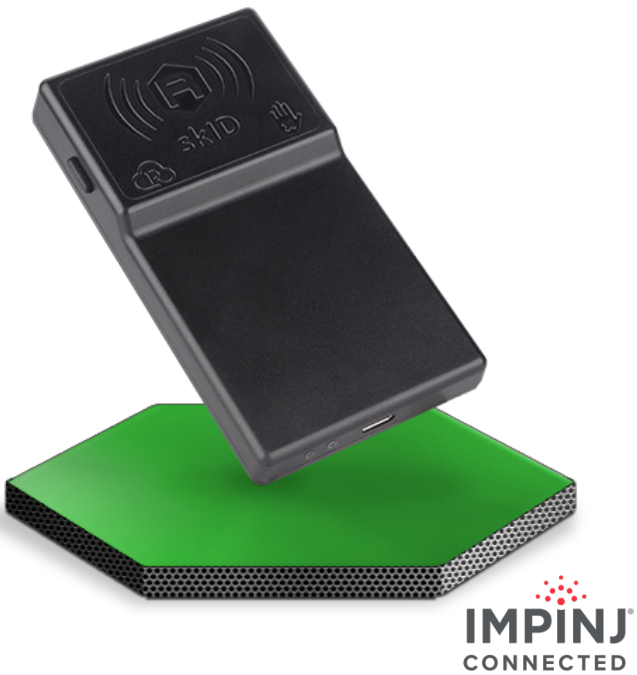

BENEFITS

High Performance reading

Pocket size

Flexibility

USB Type C

HID

Bluetooth

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- ETSI, FCC and ARIB versions available
- Bluetooth communication
- Integrated circular polarized antenna
- Ergonomic form factor
- Battery powered
- iPhone/iPad compatibility
- 3 mounting options: magnetic, 3M Dual Lock™ or SP-Connect™

Applications

- RAIN RFID add-on to smartphones, tablets and mobile terminals
- Shop inventory and cycle counting
- Mobile point of sale
- Field sales mobility
- Mobile workers

Overview

The **skID** (Model R1280IE, R1280IU, R1280IJ) is a portable RAIN RFID reader of the easy2read® product line with integrated antenna for medium range applications.

The reader hosts an internal rechargeable battery and can operate both in wired mode, using a USB cable, or in wireless mode through the Bluetooth® interface.

Thanks to the Bluetooth® communication interface, the **skID** is a perfect add-on for any Bluetooth® enabled host such as a PC, a smartphone, a PDA or a tablet for RAIN RFID readings. The reader is compatible with Windows, Android and iOS operating systems.

The device supports both Bluetooth Low Energy (BLE) and Bluetooth classic communication to provide the maximum usage flexibility, including the HID profile for keyboard emulation.

The **skID** can be easily fixed to the smartphone using 3 different methods: magnets, 3M Dual Lock or SP-Connect.

Designed for mobile operators, the **skID** is ideal for inventory management, mobile workers, service and maintenance applications.

Technical Specification Table

Frequency Range	<div><div>• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1) (Mod. R1280IE)</div><div>• 902÷928 MHz (FCC part 15.247) (Mod. R1280IU)</div><div>• 920.9÷922.3 MHz (ARIB STD-T107) (Mod. R1280IJ)</div></div>
RF Power	<div><div>• Configurable from -2 dBm ERP to 22 dBm ERP (Mod. R1280IE)</div><div>• Configurable from -1.5 dBm EIRP to 24 dBm EIRP (Mod. R1280IU, R1280IJ)</div></div>
Number of Channels	<div><div>• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1) (Mod. R1280IE)</div><div>• 50 hopping channels (compliant to FCC part 15.247) (Mod. R1280IU)</div><div>• 4 channels using 4 units radio channel (compliant to ARIB STD-T107) (Mod. R1280IJ)</div></div>
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Antenna Gain	0.0 dBic (typical)
Antenna Polarization	Integrated Circular Polarized Antenna
Read Range	Up to 2.0 m (Typical)
USB Interface	USB 2.0 Full Speed (12 Mbit/s) via USB Type-C connector
Bluetooth Interface	<div><div><div><div>• Bluetooth 4.1 Smart Ready compliant</div><div>• 12 dBm EIRP output power BR/EDR</div><div>• 8 dBm EIRP output power BLE</div><div>• HID and Serial over GATT (BLE)</div><div>• HID and SPP profiles (Bluetooth classic)</div></div></div></div>
User Interface	<div><div>• Power and Trigger buttons</div><div>• Power and battery status LED</div><div>• Communication and operation result LED</div><div>• Bi-tonal buzzer and vibration element for event signaling</div></div>
Battery Type	Li-Ion 3.7 V, 1,200 mAh
Battery Life	<div><div>• Operating: > 12 h (with 40,000 tag readings)</div><div>• Standby: > 15 days (powered off, no LED blinking)</div></div>
Battery Charging Time	<div><div>• 3 hours connected to a PC USB port</div><div>• 2 hours 15 min. with 1 A AC/DC power supply</div></div>
IP Rating	IP65
Dimensions	<div><div>• 112 x 62 x 10/16 mm³</div><div>• 4.4 x 2.4 x 0.39/0.63 inches³</div></div>
Operating Temperature	-10 °C to +55 °C
Weight	110 g
USB Cable Length	1.5 m

Ordering Options

WR1280IXEUAA	skID - RAIN RFID mini sled reader - ETSI		
WR1280IXUSAA	skID - RAIN RFID mini sled reader - FCC		
WR1280IXJPAA	skID - RAIN RFID mini sled reader - ARIB		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



Integrated Readers

Integrated Readers

Integrated readers are RAIN RFID readers with an integrated antenna so they are ready-to-use and do not require so much effort for the installation.

They are typically used for simple reading points, points of sales, encoding stations, document tracking and many other applications where you do not need very long reading distances.

CAEN RFID offering of integrated readers includes very simple USB readers as well as advanced integrated readers with multiple communication interfaces and scripting capabilities.



R1353I

Slate³

RAIN RFID Desktop Reader



BENEFITS	Slim form factor	Trigger button	USB powered	USB Type C	HID	Cost effective

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- ETSI and FCC versions available
- USB communication
- Integrated circular polarized antenna
- Slim form factor
- USB powered
- HID profile on USB available

Applications

- Points of sale
- Access control
- Tag Programming Stations
- Document tracking
- Inventory Management

Overview

The **Slate³** (Model R1353I) is a slim RAIN RFID reader of the easy2read[®] product line with integrated antenna for short to medium range applications.

The reader is powered and controlled directly by an USB type C cable, thus allowing to read RAIN RFID tags in an easy desktop environment.

Thanks to its compact size, the **Slate³** reader is the perfect choice for various applications such as points-of-sale, document tracking, tag programming stations, access control and so on. It can also be used as a building block for smart shelves and smart displays.

The **Slate³** reader supports the HID profile (native keyboard emulation) allowing to interact directly with legacy applications, office automation SW or any other generic solution requiring manual input.

The reader has a physical trigger button that, if enabled, permits to start the reading process only when needed. The same trigger signal is available also via a jack connector to use an external trigger button.

The **Slate³** can also be fixed with screws using the fixing holes available on the corners of the reader.

Being compliant with both European and US regulatory environments, the **Slate³** reader allows installations in various countries worldwide as needed by retailers, forwarders, warehouses and other global organizations.

The core component of the **Slate³** reader is the CAEN RFID **Lepton³** module, an ultra-compact RAIN RFID module based on the Impinj E310 reader IC.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1) (Mod. R1353IE)• 902÷928 MHz (FCC part 15.247) (Mod. R1353IU)
RF Power	<ul style="list-style-type: none">• Configurable from -5 dBm ERP to 20 dBm ERP (Mod. R1353IE)• Configurable from -3 dBm EIRP to 22 dBm EIRP (Mod. R1353IU)
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1) (Mod. R1353IE)• 50 hopping channels (compliant to FCC part 15.247) (Mod. R1353IU)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Antenna Gain	<ul style="list-style-type: none">• -3 dBi (typical)
Antenna Type	Circular Polarized UHF Antenna
Read Range	Up to 1 m (Typical)
USB Interface	<ul style="list-style-type: none">• USB 2.0 Full Speed (12 Mbit/s) via USB Type-C connector• HID profile available• Virtual COM Port parameters:<ul style="list-style-type: none">• Baudrate up to 921.600 kbit/s• Databits: 8• Stopbit: 1• Parity: none• Flow control: none
User Interface	<ul style="list-style-type: none">• Power button• Power and tag read status LED• Trigger button• Jack connector for external trigger button• Bi-tonal buzzer for event signaling
IP Rating	IP30
Dimensions	220 x 140 x 13/17 mm ³ (8.67 x 5.51 x 0.51/0.67 inches ³)
Operating Temperature	-10 °C to +55 °C
Weight	275 g
USB Cable Length	1.5 m

Ordering Options

WR1353IXEUAA	Slate ³ - RAIN RFID desktop reader - ETSI		
WR1353IXUSAA	Slate ³ - RAIN RFID desktop reader - FCC		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R1290I

Hex

Multipurpose
RAIN RFID Reader with PoE



BENEFITS

Display & Keypad

Customizable with Java code

Web Config. Interface

PoE

HID

USB Host & Device

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- USB and Ethernet communication
- HID profile on USB available
- Integrated circular polarized antenna and external antenna connector
- Versatile form factor
- PoE or external power supply
- USB host port
- OLED display and keypad
- Internal scripting engine

Applications

- Points of sale
- Encoding stations
- Access control
- Document tracking
- Inventory Management

Overview

The **Hex** (Model R1290IE, R1290IU), multipurpose reader of the easy2read® product line, is a RAIN RFID reader with integrated circular polarized antenna for short to medium range applications.


Thanks to its versatile form factor, the **Hex** is well suited for both desktop/counter top applications and for fixed reading point installations. It offers the Ethernet (PoE) and USB communication interface in order to simplify the installation both on large and single installations. The PoE capability permits to provide power and to communicate with the reader with a single cable when the PoE infrastructure is available.

In addition to the internal circular polarized antenna, the **Hex** provides a connector for an external antenna in order to extend the reading area of the reader and a set of GPIO lines that permits to control external devices like lights or alarms or to get triggers via external sensors (buttons, light barriers).

The USB host port, combined with the internal computing architecture, permits to connect USB peripherals like barcode scanners, keyboards, printers and many other devices transforming the **Hex** reader in a powerful and versatile identification platform.

The reader has an easy to use display and keypad interface for local configuration; the behavior of the keypad and display can be customized under customer specifications.

The **Hex** is available both for ETSI and FCC regions allowing installations in various countries worldwide as needed by retailers, forwarders, warehouses and other global organizations.

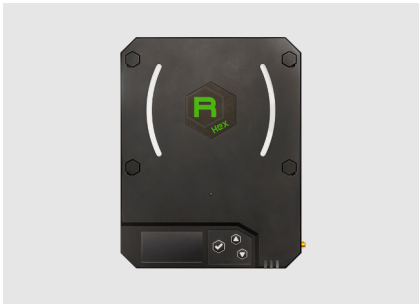

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1) (Mod. R1290IE)902÷928 MHz (FCC part 15.247) (Mod. R1290IU)
RF Power	<ul style="list-style-type: none">Configurable in 18 levels from 8 dBm ERP to 25 dBm ERP (Mod. R1290IE)Configurable in 18 levels from 8.5 dBm EIRP to 25.5 dBm EIRP (Mod. R1290IU)
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1) (Mod. R1290IE)50 hopping channels (compliant to FCC part 15.247) (Mod. R1290IU)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Internal Antenna Gain	<ul style="list-style-type: none">0.2 dBi (typical) (Mod. R1290IE)0.7 dBi (typical) (Mod. R1290IU)
Antenna Polarization	Integrated Circular Polarized Antenna
USB device Interface	<ul style="list-style-type: none">USB 2.0 Hi-Speed (480 Mbit/s) device portVirtual COM Port parameters:<ul style="list-style-type: none">Baudrate up to 921.600 kbit/sDatabits: 8Stopbit: 1Parity: noneFlow control: none
USB Host Interface	<ul style="list-style-type: none">USB 2.0 High Speed Host PortMax. 500 mA output current
Ethernet Interface	<ul style="list-style-type: none">Ethernet 10/100/1000 Base-T (RJ45)PoE standard IEEE 802.3af
User Interface	<ul style="list-style-type: none">Button √: Confirm/Trigger or other functions controlled by firmwareUp arrow: scroll up or other functions controlled by firmwareDown arrow: scroll down or other functions controlled by firmwarePower indication LEDRadiofrequency activity LEDTag identification LEDTag identification lightsBitonal buzzer for event signalingProximity sensor triggerOLED display 2.42" monochromatic (white on black)
I/O interface	<ul style="list-style-type: none">Push in PCB terminals<ul style="list-style-type: none">1 digital input (from 4V DC to 48V DC range)1 solid state photorelay output (60V DC max; 500 mA max)
Power Supply	<ul style="list-style-type: none">5 V ± 5% - DC power supply (10 W)PoE standard IEEE 802.3af (12.95 W)
IP Rating	IP30
Dimensions	<ul style="list-style-type: none">(W)220 x (L)170 x (H)25 mm³8.66 x 6.69 x 0.98 inches³
Operating Temp.	-10 °C to +55 °C
Weight	475 g

Ordering Options

WR1290IEXAAA	Hex - ETSI version		
WR1290IUXAAA	Hex - FCC version		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R1210I

trID

RAIN RFID Smart Tray Reader



BENEFITS

Confined reading range

Slim size

Battery powered

USB Type C

HID

Bluetooth

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- ETSI and FCC versions available
- Bluetooth communication
- Integrated near field antenna
- Slim form factor
- Battery powered
- iPhone/iPad compatibility

Applications

- RAIN RFID jewelry trays
- Customer engagement
- Point of sale
- Dental tools tracking
- Document tracking

Overview

The **trID** (Model R1210I) is a slim RAIN RFID reader of the easy2read® product line with integrated antenna for short range applications.

The reader hosts an internal rechargeable battery and can operate both in wired mode, using a USB cable, or in wireless mode through the Bluetooth® interface.

Thanks to the Bluetooth® communication interface, the **trID** can be connected to any Bluetooth® enabled host such as a PC, a smartphone, a PDA or a tablet for RAIN RFID readings. The reader is compatible with Windows, Android and iOS operating systems. The device supports both Bluetooth Low Energy (BLE) and Bluetooth classic communication to provide the maximum usage flexibility, including the HID profile for keyboard emulation.

The **trID** slim form factor permits to embed the reader in jewelry trays or to use it on a desk for document tracking or in healthcare environment to track surgery or dental tools.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1) (Mod. R1210IE)• 902÷928 MHz (FCC part 15.247) (Mod. R1210IU)
RF Power	<ul style="list-style-type: none">• Configurable from -12 dBm ERP to 2 dBm ERP (Mod. R1210IE)• Configurable from -10 dBm EIRP to 4 dBm EIRP (Mod. R1210IU)
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1) (Mod. R1210IE)• 50 hopping channels (compliant to FCC part 15.247) (Mod. R1210IU)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Antenna Gain	-19.0 dBic (typical)
Antenna Type	Near Field UHF Antenna
Read Range	Up to 15 cm (Typical)
USB Interface	USB 2.0 Full Speed (12 Mbit/s) via USB Type-C connector
Bluetooth Interface	<ul style="list-style-type: none">• Bluetooth 4.1 Smart Ready compliant• 12 dBm EIRP output power BR/EDR• 8 dBm EIRP output power BLE• HID and Serial over GATT (BLE)• HID and SPP profiles (Bluetooth classic)
User Interface	<ul style="list-style-type: none">• Power button• Power and battery status LED• Communication and operation result LED• Bi-tonal buzzer for event signaling
Battery Type	Li-Ion 3.7 V, 2100 mAh
Battery Life	<ul style="list-style-type: none">• Operating: > 18 hours (with 60,000 tag readings)• Standby: > 30 days (powered off, no LED blinking)
Battery Charging Time	<ul style="list-style-type: none">• 6 hours connected to a PC USB port• 2 hours 40 min. with 1 A AC/DC power supply
IP Rating	IP30
Dimensions	217 x 146 x 14 mm ³ (8.54 x 5.75 x 0.55 inches ³)
Operating Temperature	-10 °C to +55 °C
Weight	375 g
USB Cable Length	1.5 m

Ordering Options

WR1210IXEUAA	trID - RAIN RFID smart tray reader - ETSI		
WR1210IXUSAA	trID - RAIN RFID smart tray reader - FCC		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



Fixed Readers

Fixed Readers

The typical and most frequent installation of RAIN RFID technology is the so-called portal or gate. It consists of a fixed reader (interrogator) placed around an area of entrance/exit from a distribution center or a manufacturing plant. Sometimes fixed readers are used outdoors for vehicles or for people identification, at the entrance of parking lots or any other entry point in buildings and boundaries of enterprise premises.

RAIN RFID technology is also used during sport events, especially on check points to verify timings and performances in amateur and professional races. Other applications include RFID tunnels used for the identification of tags inside boxes in manufacturing processes and on-vehicle installation (forklifts, trucks) for asset management and inventory.



R4320P

Proton

Industrial 4-port RAIN RFID
Long Range Reader



BENEFITS

Industrial IP65

M12 connectors

High Sensitivity

Customizable with Java code

PoE

Web Config. Interface

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Four 50 Ohm TNC-RP antenna connectors
- Power over Ethernet interface
- Up to 31.5 dBm (1.4 W) output power
- Internal scripting engine
- IP65 in compact form factor
- PoE or external power supply
- M12 industrial connectors
- Development Kit available

Applications

- RAIN RFID portals for logistic
- Industrial automation reading points
- RAIN RFID tunnels
- Access control reading points

Overview

The **Proton** (Model R4320P) is a rugged long range RAIN RFID reader of the easy2read® product line, well suited for industrial environment installations.

The **Proton** reader has 4 antenna ports capable of a 31.5 dBm maximum power enabling to build RAIN RFID portals for logistic. Its compact form factor makes it easy to install and the IP65 protection permits outdoor or harsh environment installations. Featuring Power Over Ethernet, RS232 and GPIOs via industry standard M12 connectors the **Proton** is an ideal choice for industrial automation and Industry 4.0 solutions.

The **Proton** is based upon an embedded Linux platform and it's easily configurable using an internal web interface. System integrators can customize the behavior of the reader installing Java code that, having access to all the RFID features and interfaces, permits a full customization.

The **Proton** reader complies with and can operate in both European and US regulatory environments and, due to its multiregional capabilities, it's ideal for integration in solutions requiring compliance to different geographical regions.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.1.1)902÷928 MHz (FCC part 15.247)920.250÷925.750 MHz (Australia Radiocommunication LIPD Class License 2015) (Mod. R1280IU)922.250÷927.250 MHz (New Zealand Notice Number 2022-go3100) (Mod. R1280IU)
RF Power	<ul style="list-style-type: none">Up to 31.5 dBm (1.4 W) conducted (ETSI)Up to 30 dBm (1 W) conducted (FCC)
RX Sensitivity	-84 dBm – 10%PER, assuming 20 dB antenna RL @ 31.5 dBm output
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.1.1)50 hopping channels (compliant to FCC part 15.247)12 hopping channels (compliant to Australia Radiocommunication LIPD Class License 2015) (Mod. R1280IU)11 hopping channels (compliant to New Zealand Notice Number 2022-go3100) (Mod. R1280IU)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
CPU	ARM9 @ 400 MHz on Atmel AT91SAM9G25
Operating System	Linux
Receiving Capability	<ul style="list-style-type: none">Gen 2 Dense Reader Mode ManagementData rate up to 400 kbit/s
Connectivity	<ul style="list-style-type: none">RS232 Serial Communication (M12 connector)Baudrate up to 115.200 kbit/sDatabits: 8Stopbit: 1Parity: noneFlow control: noneEthernet 10/100/1000Base-T (M12 connector)PoE standard IEEE 802.3af
I/O Interface	<ul style="list-style-type: none">M12 connector2 digital inputs optically isolated (from 4V DC to 48V DC range)2 solid state photorelay outputs optically isolated (60V DC max; 500mA max)
Antenna Connectors	4 TNC Reverse Polarity
Power Supply	<ul style="list-style-type: none">9÷36 V DC power supply (12 W)PoE standard IEEE 802.3af (12.95 W)
Status Indicators	Multicolour LEDs: Power, Activity, Status and Applications
IP Rating	IP65
Dimensions	<ul style="list-style-type: none">(W)131 x (L)106 x (H)50 mm³5.15 x 4.17 x 1.96 inches³
Operating Temperature	-10 °C to +55 °C
Weight	530 g

Ordering Options

WR4320PXAAAA	Proton - Industrial Long Range Reader		
WR4320PXDKEU	Proton - ETSI Dev. Kit		
WR4320PXDKUS	Proton - FCC Dev. Kit		
WALIM0000006	Proton power supply - EU		
WALIM0000007	Proton power supply - US		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R4321P

Quattro

Smart 4-port RAIN RFID
Long Range Reader



BENEFITS

High Sensitivity

Customizable
with Java code

Long Range

IOIO
GP I/O

PoE

USB Host & Device

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Four 50 Ohm TNC-RP antenna connectors
- Power over Ethernet interface
- Up to 31.5 dBm (1.4 W) output power
- Internal scripting engine
- USB host port
- PoE or external power supply

Applications

- RAIN RFID portals for logistic
- Industrial automation reading points
- RAIN RFID tunnels
- Access control reading points
- Smart shelves and smart displays

Overview

The **Quattro** (Model R4321P) is a compact long range RAIN RFID reader of the easy2read® product line, well suited for retail and warehousing installations.

The **Quattro** reader has 4 antenna ports capable of a 31.5 dBm maximum power enabling to build RAIN RFID portals for long range reading. Its slim form factor makes it easy to install even when limited space is available. It offers the Ethernet (PoE) and USB communication interface in order to simplify the installation both on large and single read point solutions. The Power over Ethernet capability permits to provide power and to communicate with the reader with a single cable.

The USB host port, combined with the internal computing architecture, permits to connect USB peripherals like barcode scanners, keyboards, printers and many others transforming the **Quattro** reader in a powerful and versatile identification platform.

The **Quattro** is based upon an embedded Linux platform and it's easily configurable using an internal web interface. System integrators can customize the behavior of the reader installing Java code that, having access to all the RFID features and interfaces, permits a full customization.

The **Quattro** reader complies with and can operate in both European and US regulatory environments and, due to its multiregional capabilities, it's ideal for integration in solutions requiring compliance to different geographical regions.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.1.1)902÷928 MHz (FCC part 15.247)
RF Power	<ul style="list-style-type: none">Up to 31.5 dBm (1.4 W) conducted (ETSI)Up to 30 dBm (1 W) conducted (FCC)
RX Sensitivity	-84 dBm – 10%PER, assuming 20 dB antenna RL @ 31.5 dBm output
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.1.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
CPU	ARM9 @ 400 MHz on Atmel AT91SAM9G25
Operating System	Linux
Receiving Capability	<ul style="list-style-type: none">Gen 2 Dense Reader Mode ManagementData rate up to 400 kbit/s
Connectivity	<ul style="list-style-type: none">USB Interface: USB 2.0 High Speed (480 Mbit/s) device port (USB mini connector)Virtual COM port parameters:<ul style="list-style-type: none">Baudrate up to 115.200 kbit/sDatabits: 8Stopbit: 1Parity: noneFlow control: noneEthernet 10/100/1000Base-T (RJ45)PoE standard IEEE 802.3af
I/O Interface	<ul style="list-style-type: none">10 Poles Terminal Block with screw connector2 digital inputs optically isolated (from 4V DC to 48V DC range)2 solid state photorelay outputs optically isolated (60V DC max; 500mA max)
Antenna Connectors	4 TNC Reverse Polarity
Power Supply	<ul style="list-style-type: none">5 V DC power supply (12 W)PoE standard IEEE 802.3af (12.95 W)
Status Indicators	Multicolour LEDs: Power, Activity, Status and Applications
IP Rating	IP30
Dimensions	<ul style="list-style-type: none">(W)210 x (L)140 x (H)27 mm³8.27 x 5.51 x 1.06 inches³
Operating Temperature	-10 °C to +55 °C
Weight	740 g

Ordering Options

WR4321PXAAAA	Quattro - Smart Long Range Reader		
WR4321PXDKEU	Quattro - ETSI Dev. Kit		
WR4321PXDKUS	Quattro - FCC Dev. Kit		
WALIM0000005	Quattro power supply		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



STOCK

	left	order
Item A:	5	
Item B:	3	✓
Item C:	4	✓
Item D:	8	
Item F:	7	
Item G:	5	✓
Item H:	0	✓
Item I:	2	✓
Item J:	4	✓
Item K:	4	

Embedded Readers

RAIN RFID technology is widely used in devices like mobile computers, PDAs, handhelds, label printers and applicators, desktop readers, informative kiosks, industrial readers and smart shelves.

CAEN RFID embedded readers are the best choice for those companies wishing to integrate the RAIN RFID technology in their existing or new products.

Our embedded readers product line includes modules in different size, power consumption and read distance.


Embedded Readers



R9100C

Lepton⁹

30dBm 1-Port
RAIN RFID Reader Module

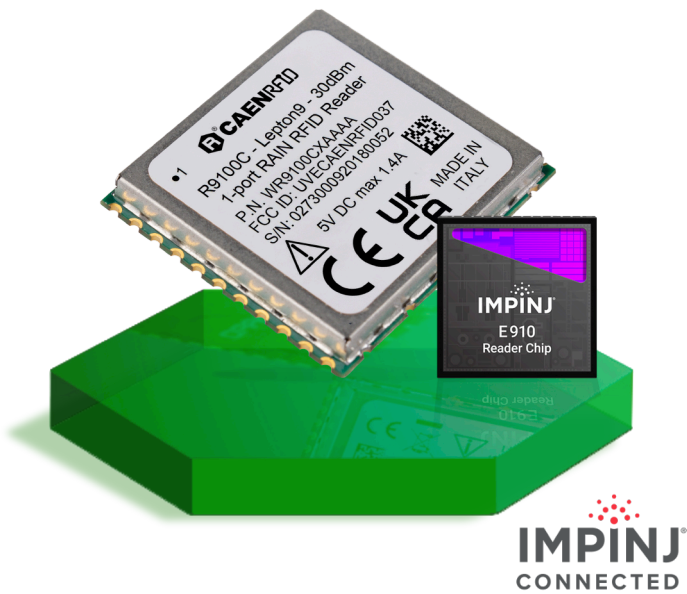

BENEFITS	Ultra compact size	High Sensitivity (-90dBm)	Surface mount device (SMD)	IOIOI Serial interface	
----------	--------------------	---------------------------	----------------------------	---------------------------	--

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Up to 30 dBm (1 W) output power
- 90dBm sensitivity
- Multiregional support
- Ultra compact size
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Autonomous vehicle mounted readers for inventory
- Fixed mount readers for scan tunnels and logistic portals
- Overhead readers for industrial warehouses

Overview

The **Lepton⁹** (Model R9100C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 10 m of distance (depending on antenna and tag dimensions).

The radio frequency core of the module is based on the **Impinj E910** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

Due to its high sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The compactness of the device and the surface mount technology allow to embed the **Lepton⁹** inside the new small form factor industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton⁹** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁹** is pin-to-pin compatible with the **Impinj RS1000** and **RS500** modules making it a perfect replacement for these devices.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">-90 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	50 Ohm mono-static RF port on a single pin
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial Port:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">1.4 A @ 5 V - RF out = 30 dBm5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)32 x (W)29 x (H)4.1 mm³1.26 x 1.14 x 0.16 inches³
Package Type	32 pin surface mount module (SMT compatible)
Operating Temperature	-20 °C to +70 °C
Weight	5.4 g

Ordering Options

WR9100CXAAAA	Lepton9 - 30dBm Reader Module		
WRHML37XEVBX	R1271, Rx100 evaluation board		
WRHML37XDKEU	R1271, Rx100 dev. kit - ETSI		
WRHML37XDKUS	R1271, Rx100 dev. Kit - FCC		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R9101C

Lepton⁹x1

30dBm 1-Port
RAIN RFID Reader Module



BENEFITS	Compact size	High Sensitivity (-90dBm)	Molex data connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------	---------------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Up to 30 dBm (1 W) output power
- 90dBm sensitivity
- Multiregional support
- Compact size
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Autonomous vehicle mounted readers for inventory
- Long range reading points
- Overhead readers for industrial warehouses

Overview

The **Lepton⁹x1** (Model R9101C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 10 m of distance (depending on antenna and tag dimensions).




The radio frequency core of the module is based on the **Impinj E910** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

Due to its high sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The compactness of the device allows to embed the **Lepton⁹x1** inside industrial single antenna readers and other compact form factor devices.

The **Lepton⁹x1** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁹x1** is designed on the basis of the **Lepton⁹** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor. The **Lepton⁹x1** has also a wider power supply voltage range to permit to connect it directly to battery packs (Model R9101C).

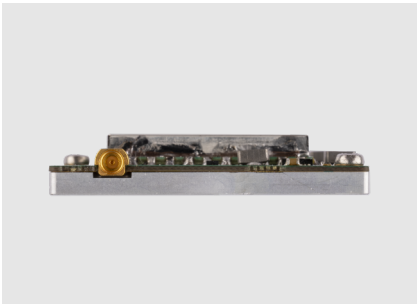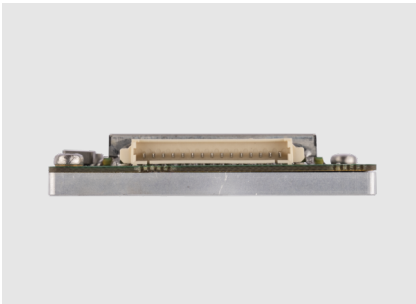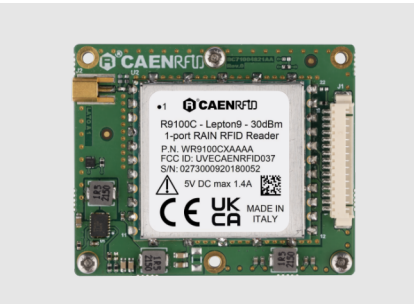

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">-90 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial PortCommunication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	<ul style="list-style-type: none">3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">8W max @ RF out = 30 dBm80 mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)51 x (W)42 x (H)8.1 mm³ /2.01 x 1.65 x 0.32 inches³
Operating Temperature	-20 °C to +70 °C
Weight	30 g

Ordering Options

WR9101CXAAAA	Lepton9x1 - 30dBm Reader Module		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXEVBX	Hadron, Rx101, Rx104 Eval. Board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R9101CU

Lepton⁹x1-USB

30dBm 1-Port USB
RAIN RFID Reader Module

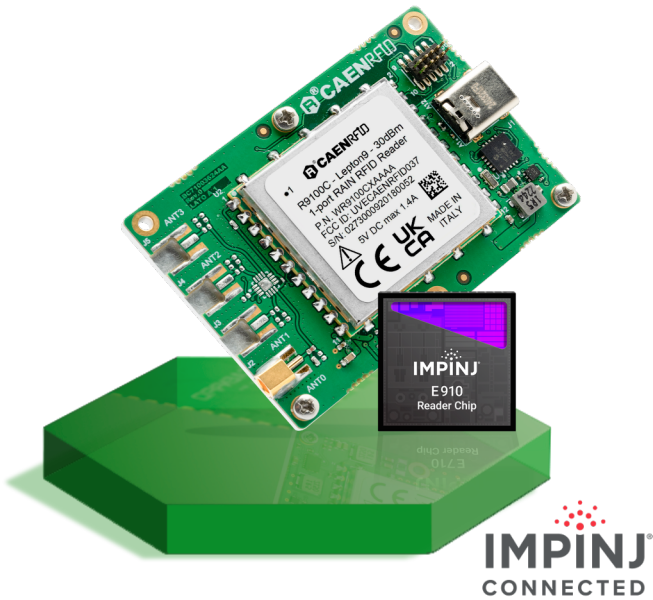

BENEFITS	Compact size	High Sensitivity (-90dBm)	USB Type-C connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------	---------------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Up to 30 dBm (1 W) output power
- -90dBm sensitivity
- Multiregional support
- Compact size
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- Handheld devices
- Autonomous vehicle mounted readers for inventory
- Long range reading points
- Overhead readers for industrial warehouses

Overview

The **Lepton⁹x1-USB** (Model R9101CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 10 m of distance (depending on antenna and tag dimensions).



The radio frequency core of the module is based on the **Impinj E910** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

Due to its high sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The compactness of the device allows to embed the **Lepton⁹x1-USB** inside industrial single antenna readers and other compact form factor devices.

The **Lepton⁹x1-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁹x1-USB** is designed on the basis of the **Lepton⁹** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

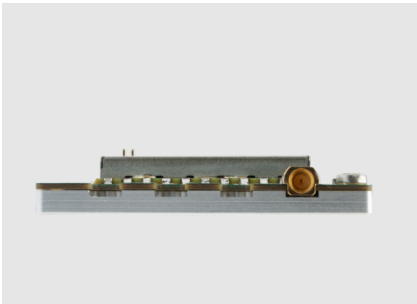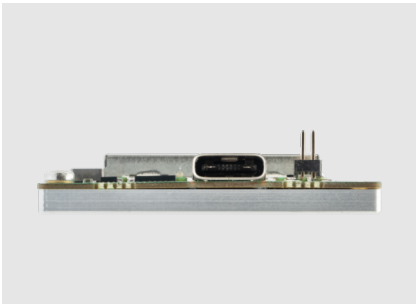

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)• 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 10 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">• -90 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1)• 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">• USB Type-C Virtual COM Port• Communication parameters:<ul style="list-style-type: none">• Baudrate from 9.6 to 921.6 kbps, default 921.6 kbps• Databits: 8• Stopbit: 1• Parity: none• Flow control: none• 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">• 4 I/O lines 3.3 V level• Iout = 8 mA max.
Power Supply	<ul style="list-style-type: none">• 4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">• 8W max @ RF out = 30 dBm• 80 mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">• (L)61 x (W)42 x (H)9.1 mm3 /2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	30 g

Ordering Options

WR9101CUXAAA	Lepton9x1-USB - 30dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R9104C

Lepton⁹x4

30dBm 4-Port
RAIN RFID Reader Module

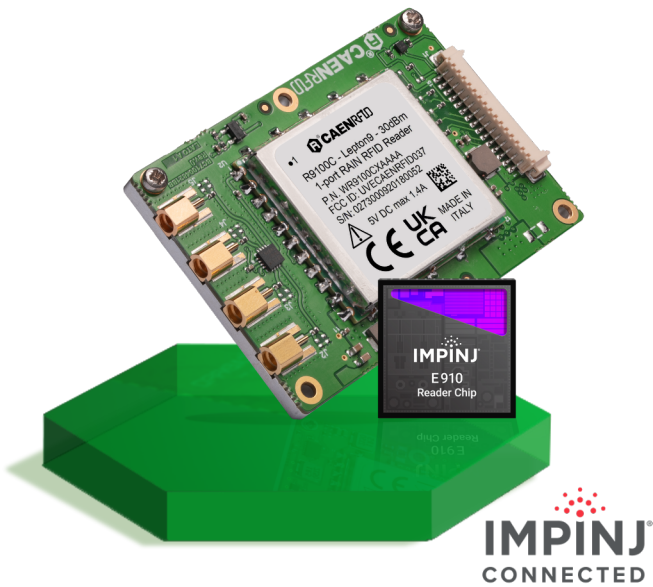

BENEFITS	Ultra compact size	High Sensitivity (-90dBm)	Molex data connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	---------------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Up to 30 dBm (1 W) output power
- 90dBm sensitivity
- Multiregional support
- Compact size
- 4 antenna ports
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Autonomous vehicle mounted readers for inventory
- Fixed mount readers for scan tunnels and logistic portals
- Overhead readers for industrial warehouses

Overview

The **Lepton⁹x4** (Model R9104C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 10 m of distance (depending on antenna and tag dimensions).



The radio frequency core of the module is based on the **Impinj E910** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

Due to its high sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The **Lepton⁹x4** module is the ideal RFID engine for high-performance fixed readers.

The **Lepton⁹x4** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁹x4** is designed on the basis of the **Lepton⁹** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor. The **Lepton⁹x4** has also a wider power supply voltage range to permit to connect it directly to battery packs.

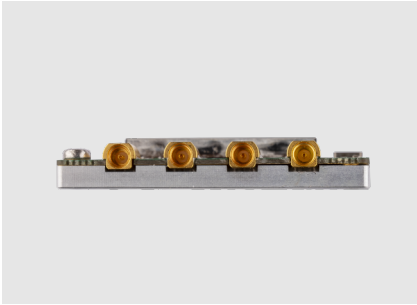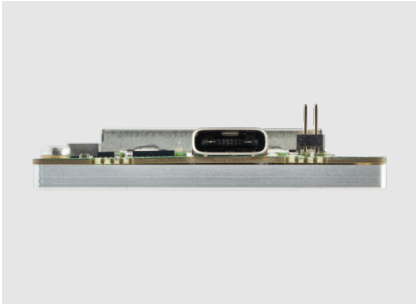

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">-90 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial PortCommunication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	<ul style="list-style-type: none">3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">8W max @ RF out = 30 dBm80mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)60 x (W)42 x (H)8.1 mm³ /2.36 x 1.65 x 0.32 inches³
Operating Temperature	-20 °C to +70 °C
Weight	34 g

Ordering Options

WR9104CXAAAA	Lepton9x4 - 30dBm Reader Module		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXVBX	Hadron, Rx101, Rx104 Eval. Board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R9104CU

Lepton⁹x4-USB

30dBm 4-Port USB
RAIN RFID Reader Module

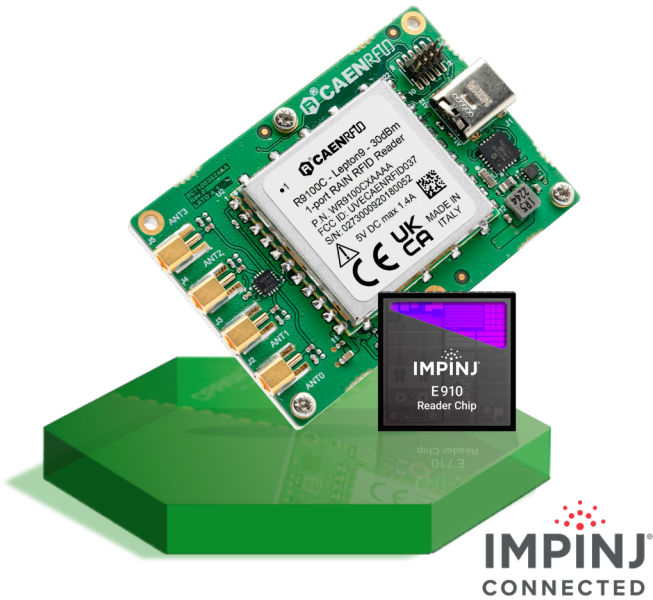

BENEFITS	Ultra compact size	High Sensitivity (-90dBm)	USB Type-C connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	---------------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Up to 30 dBm (1 W) output power
- -90dBm sensitivity
- Multiregional support
- Compact size
- 4 antenna ports
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- Handheld devices
- Autonomous vehicle mounted readers for inventory
- Fixed mount readers for scan tunnels and logistic portals
- Overhead readers for industrial warehouses

Overview

The **Lepton⁹x4-USB** (Model R9104CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 10 m of distance (depending on antenna and tag dimensions).

The radio frequency core of the module is based on the **Impinj E910** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

Due to its high sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The **Lepton⁹x4-USB** module is the ideal RFID engine for high-performance fixed readers, the USB interface make it simple to connect to most SBCs availble on the market.

The **Lepton⁹x4-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁹x4-USB** is designed on the basis of the **Lepton⁹** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor..



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)• 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">• -90 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1)• 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">• USB Type-C Virtual COM Port• Communication parameters:<ul style="list-style-type: none">• Baudrate from 9.6 to 921.6 kbps, default 921.6 kbps• Databits: 8• Stopbit: 1• Parity: none• Flow control: none• 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">• 4 I/O lines 3.3 V level• Iout = 8 mA max.
Power Supply	<ul style="list-style-type: none">• 4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">• 8W max @ RF out = 30 dBm• 80mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">• (L)61 x (W)42 x (H)9.1 mm3 /2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	34 g

Ordering Options

WR9104CUXAAA	Lepton9x4-USB - 30dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R7100C

Lepton⁷

30dBm 1-Port
RAIN RFID Reader Module

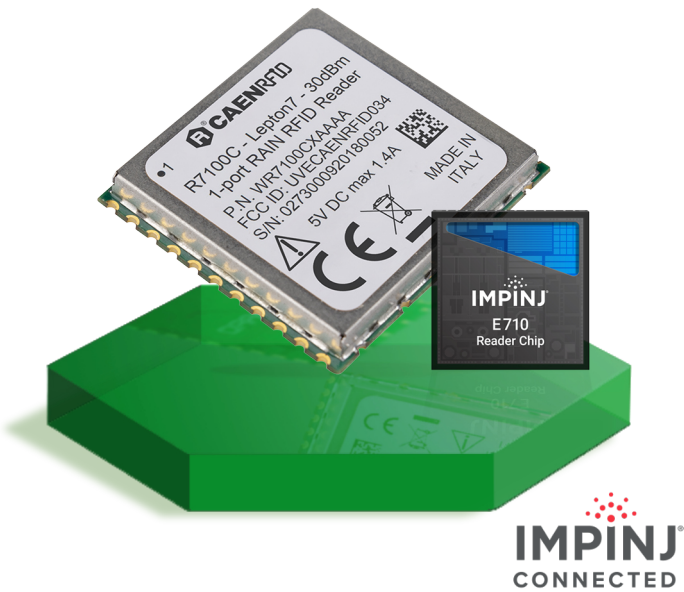

BENEFITS	Ultra compact size	High Sensitivity	Surface mount device (SMD)	IOIOI Serial interface	
----------	--------------------	------------------	----------------------------	---------------------------	--

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 30 dBm (1 W) output power
- Serial interface (TTL Levels)
- Low power consumption

Applications

- High-performance, long-range RAIN RFID readers
- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Smart shelves and cabinets
- Long range reading points

Overview

The **Lepton⁷** (Model R7100C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 5 m of distance (depending on antenna and tag dimensions).


Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device and the surface mount technology allow to embed the **Lepton⁷** inside the new small form factor industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton⁷** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁷** is pin-to-pin compatible with the **Impinj RS1000** and **RS500** modules making it a perfect replacement for these devices.

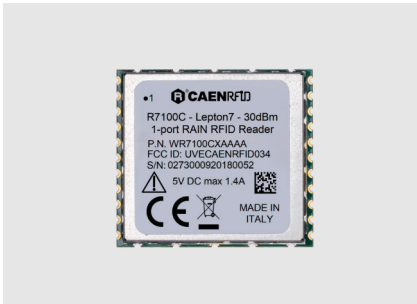

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">-85 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	50 Ohm mono-static RF port on a single pin
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial Port:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">1.4 A @ 5 V - RF out = 30 dBm5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)32 x (W)29 x (H)4.1 mm³1.26 x 1.14 x 0.16 inches³
Package Type	32 pin surface mount module (SMT compatible)
Operating Temperature	-20 °C to +70 °C
Weight	5.4 g

Ordering Options

WR7100CXAAAA	Lepton7 - 30dBm Reader Module		
WRHML37XEVBX	R1271, Rx100 evaluation board		
WRHML37XDKEU	R1271, Rx100 dev. Kit - ETSI		
WRHML37XDKUS	R1271, Rx100 dev. Kit - FCC		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R7101C

Lepton⁷x1

30dBm 1-Port
RAIN RFID Reader Module



BENEFITS	Ultra compact size	High Sensitivity	Molex data connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 30 dBm (1 W) output power
- Serial interface (TTL Levels)
- Low power consumption

Applications

- High-performance, long-range RAIN RFID readers
- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Long range reading points

Overview

The **Lepton⁷x1** (Model R7101C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 5 m of distance (depending on antenna and tag dimensions).


Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton⁷x1** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton⁷x1** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁷x1** is designed on the basis of the **Lepton⁷** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor. The **Lepton⁷x1** has also a wider power supply voltage range to permit to connect it directly to battery packs.

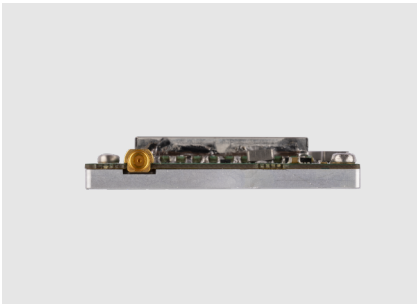

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	-85 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial PortCommunication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">8W max @ RF out = 30 dBm80 mW in idle mode - Ready to receive commands
Dimensions	(L)51 x (W)42 x (H)8.1 mm ³ /2.01 x 1.65 x 0.32 inches ³
Operating Temperature	-20 °C to +70 °C
Weight	30 g

Ordering Options

WR7101CXAAAA	Lepton7x1 - 30dBm Reader Module		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXVBX	Hadron, Rx101, Rx104 Eval. Board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R7101CU

Lepton⁷x1-USB

30dBm 1-Port USB
RAIN RFID Reader Module

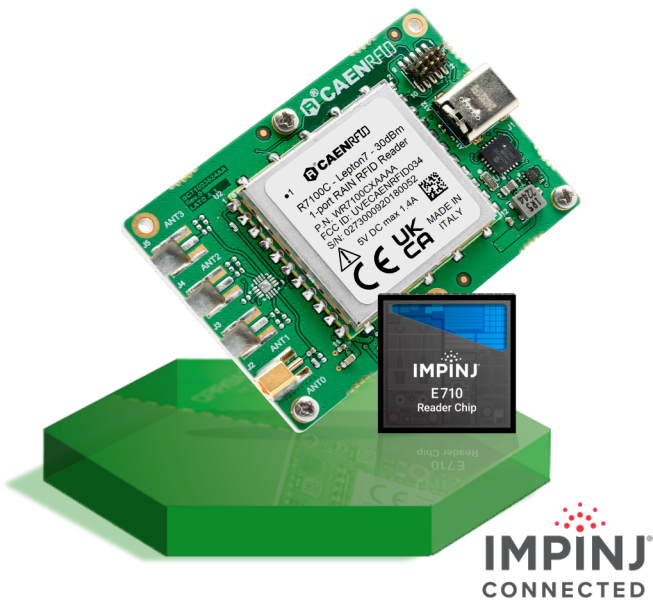

BENEFITS	Ultra compact size	High Sensitivity	USB Type-C connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 30 dBm (1 W) output power
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- High-performance, long-range RAIN RFID readers
- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Long range reading points

Overview

The **Lepton⁷x1-USB** (R7101CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 5 m of distance (depending on antenna and tag dimensions).




Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton⁷x1-USB** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton⁷x1-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁷x1-USB** is designed on the basis of the **Lepton⁷** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

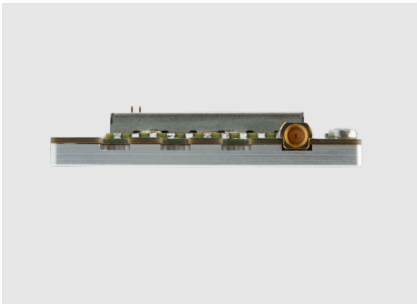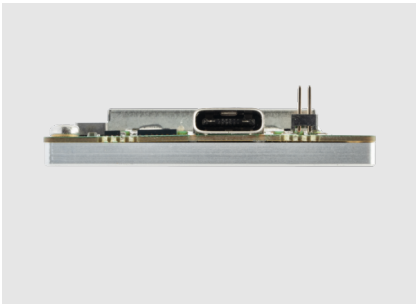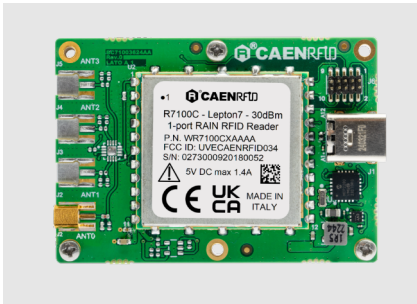

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)• 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">• -85 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1)• 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">• USB Type-C Virtual COM Port• Communication parameters:<ul style="list-style-type: none">• Baudrate from 9.6 to 921.6 kbps, default 921.6 kbps• Databits: 8• Stopbit: 1• Parity: none• Flow control: none• 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">• 4 I/O lines 3.3 V level• Iout = 8 mA max.
Power Supply	<ul style="list-style-type: none">• 4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">• 8W max @ RF out = 30 dBm• 80 mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">• (L)61 x (W)42 x (H)9.1 mm³ /2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	30 g

Ordering Options

WR7101CUXAAA	Lepton7x1-USB - 30dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R7104C

Lepton⁷x4

30dBm 4-Port
RAIN RFID Reader Module



BENEFITS	Ultra compact size	High Sensitivity	Molex data connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 30 dBm (1 W) output power
- 4 antenna ports
- Serial interface (TTL Levels)
- Low power consumption

Applications

- High-performance, long-range RAIN RFID readers
- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Fixed mount readers for scan tunnels and logistic portals

Overview

The **Lepton⁷x4** (Model R7104C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 5 m of distance (depending on antenna and tag dimensions).

Due to its high power and sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The radio frequency core of the module is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton⁷x4** inside industrial readers, and other compact form factor devices.

The **Lepton⁷x4** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁷x4** is designed on the basis of the **Lepton⁷** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor. The **Lepton⁷x4** has also a wider power supply voltage range to permit to connect it directly to battery packs.



Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">-85 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial Port (Model R7104C)Communication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	<ul style="list-style-type: none">3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">8W max @ RF out = 30 dBm80mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)60 x (W)42 x (H)8.1 mm³ /2.36 x 1.65 x 0.32 inches³
Operating Temperature	-20 °C to +70 °C
Weight	34 g

Ordering Options

WR7104CXAAAA	Lepton7x4 - 30dBm Reader Module		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXVBX	Hadron, Rx101, Rx104 Eval. Board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R7104CU

Lepton⁷x4-USB

30dBm 4-Port USB
RAIN RFID Reader Module

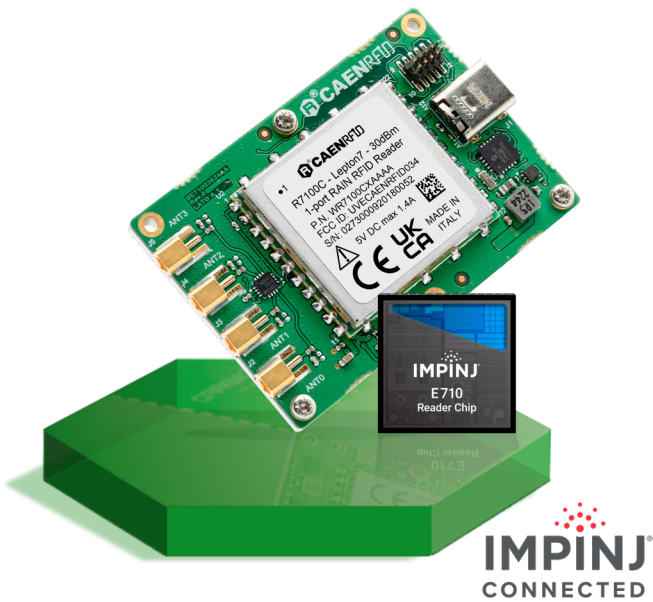

BENEFITS	Ultra compact size	High Sensitivity	USB Type-C connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 30 dBm (1 W) output power
- 4 antenna ports
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- High-performance, long-range RAIN RFID readers
- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Fixed mount readers for scan tunnels and logistic portals

Overview

The **Lepton⁷x4-USB** (Model R7104CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 30 dBm, the reader can detect tags at more than 5 m of distance (depending on antenna and tag dimensions).




Due to its high power and sensitivity, the module is well suited to design industry-leading, dense tag environment RAIN RFID readers.

The radio frequency core of the module is based on the **Impinj E710** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton⁷x4-USB** inside industrial readers, and other compact form factor devices.

The **Lepton⁷x4-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton⁷x4-USB** is designed on the basis of the **Lepton⁷** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

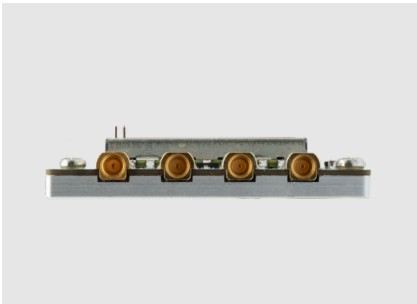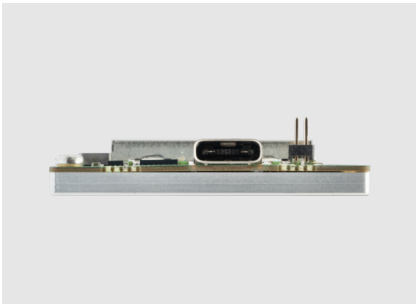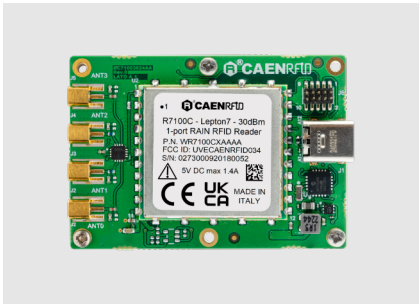

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)• 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 30 dBm (from 1 mW to 1 W) conducted power
RX Sensitivity	<ul style="list-style-type: none">• -85 dBm - 10%PER, assuming 20 dB antenna RL @ 30 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1)• 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">• USB Type-C Virtual COM Port• Communication parameters:<ul style="list-style-type: none">• Baudrate from 9.6 to 921.6 kbps, default 921.6 kbps• Databits: 8• Stopbit: 1• Parity: none• Flow control: none• 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">• 4 I/O lines 3.3 V level• Iout = 8 mA max.
Power Supply	<ul style="list-style-type: none">• 4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">• 8W max @ RF out = 30 dBm• 80mW in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">• (L)61 x (W)42 x (H)9.1 mm³ /2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	34 g

Ordering Options

WR7104CUXAAA	Lepton7x4-USB - 30dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R3100C

Lepton³

25dBm 1-Port
RAIN RFID Reader Module

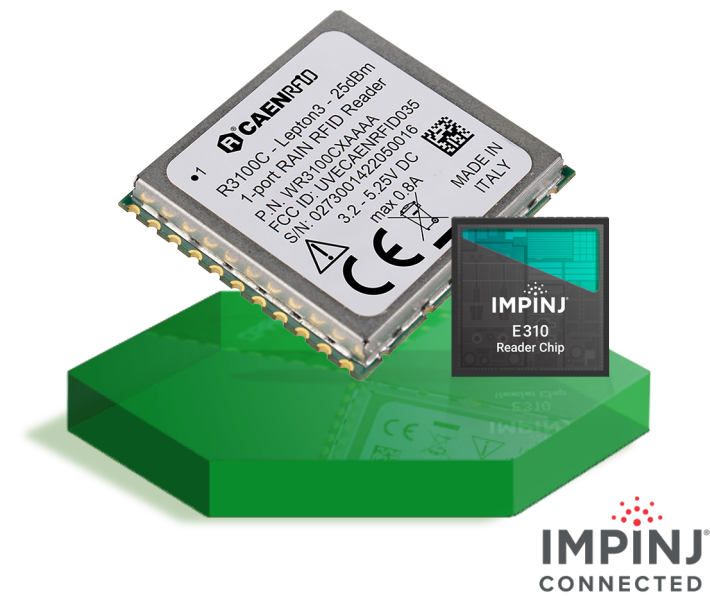

BENEFITS	Ultra compact size	High Sensitivity	Surface mount device (SMD)	IOIOI Serial interface		
----------	--------------------	------------------	----------------------------	---------------------------	--	--

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316 mW) output power
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves
- Smart appliances for home automation
- Security and access management systems

Overview

The **Lepton³** (Model R3100C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 25 dBm, the reader can detect tags at more than 2 m of distance (depending on antenna and tag dimensions).


Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device and the surface mount technology allow to embed the **Lepton³** inside the new small form factor industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³** is pin-to-pin compatible with the **Impinj RS1000** and **RS500** modules making it a perfect replacement for these devices.

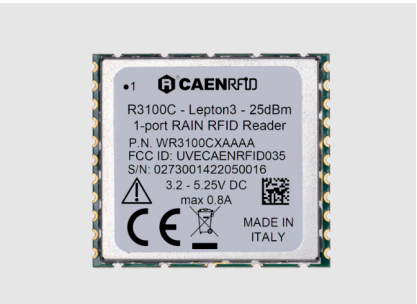

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 25 dBm (from 1 mW to 316 mW) conducted power
RX Sensitivity	<ul style="list-style-type: none">-72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	50 Ohm mono-static RF port on a single pin
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial Port:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">800 mA @ 5 V - RF out = 25 dBm5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)32 x (W)29 x (H)4.1 mm³1.26 x 1.14 x 0.15 inches³
Package Type	32 pin surface mount module (SMT compatible)
Operating Temperature	-20 °C to +70 °C
Weight	5.4 g

Ordering Options

WR3100CXAAAA	Lepton3 - 25dBm Reader Module		
WRHML37XEVBX	R1271, Rx100 evaluation board		
WRHML37XDKEU	R1271, Rx100 dev. kit - ETSI		
WRHML37XDKUS	R1271, Rx100 dev. Kit - FCC		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R3101C

Lepton³x1

25dBm 1-Port
RAIN RFID Reader Module



BENEFITS	Ultra compact size	High Sensitivity	Molex data connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316 mW) output power
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves
- Smart appliances for home automation
- Security and access management systems

Overview

The **Lepton³x1** (Model R3101C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 25 dBm, the reader can detect tags at more than 2 m of distance (depending on antenna and tag dimensions).



Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton³x1** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³x1** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³x1** is designed on the basis of the **Lepton³** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

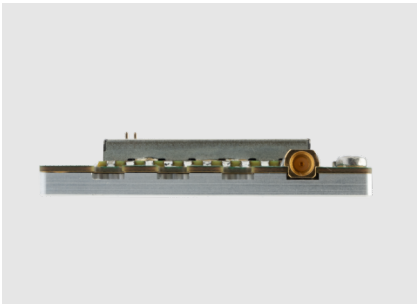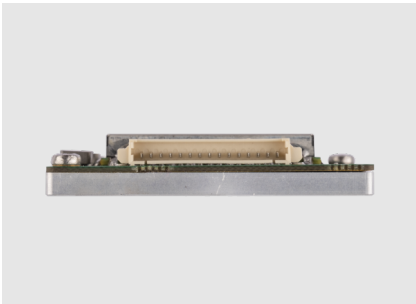

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 25 dBm (from 1 mW to 316 mW) conducted power
RX Sensitivity	<ul style="list-style-type: none">-72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial PortCommunication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	<ul style="list-style-type: none">3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">800 mA @ 5 V - RF out = 25 dBm5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)51 x (W)42 x (H)8.1 mm³ /2.01 x 1.65 x 0.32 inches³
Operating Temperature	-20 °C to +70 °C
Weight	30 g

Ordering Options

WR3101CXAAAA	Lepton3x1 - 25dBm Reader Module		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXEBX	Hadron, Rx101, Rx104 Eval. Board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R3101CU

Lepton³x1-USB

25dBm 1-Port USB
RAIN RFID Reader Module

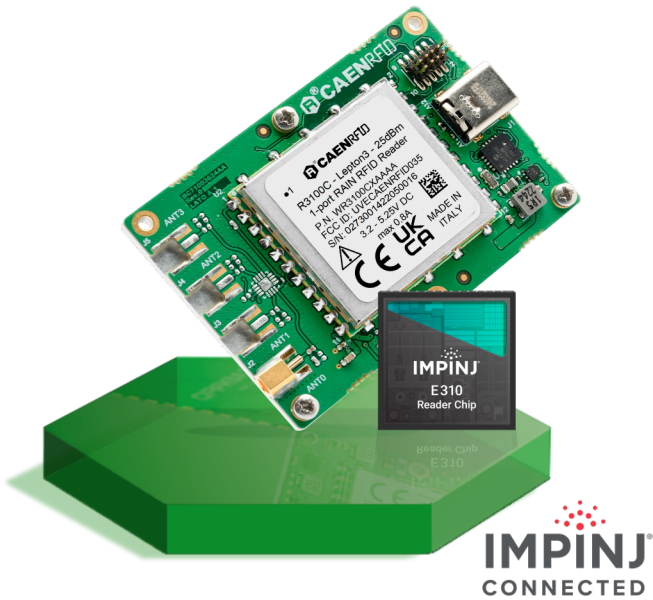

BENEFITS	Ultra compact size	High Sensitivity	USB Type-C connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316 mW) output power
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves
- Smart appliances for home automation
- Security and access management systems

Overview

The **Lepton³x1-USB** (Model R3101CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 25 dBm, the reader can detect tags at more than 2 m of distance (depending on antenna and tag dimensions).



Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton³x1-USB** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³x1-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³x1-USB** is designed on the basis of the **Lepton³** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

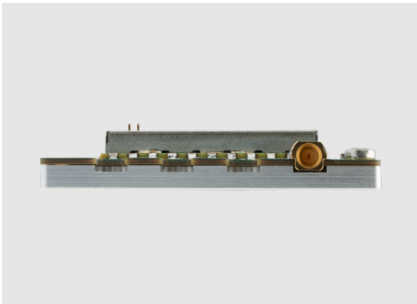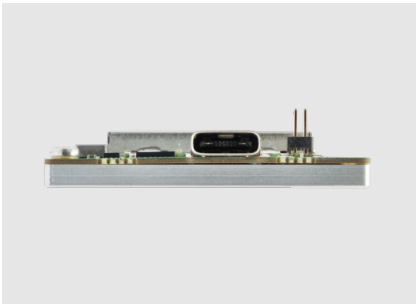

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 25 dBm (from 1 mW to 316 mW) conducted power
RX Sensitivity	<ul style="list-style-type: none">-72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	MMCX jack
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">USB Type-C Virtual COM PortCommunication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	<ul style="list-style-type: none">4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">800 mA @ 5 V - RF out = 25 dBm5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">(L)61 x (W)42 x (H)9.1 mm³ /2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	30 g

Ordering Options

WR3101CUXAAA	Lepton3x1-USB - 25dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R3104C

Lepton³x4

25dBm 4-Port
RAIN RFID Reader Module



BENEFITS	Ultra compact size	High Sensitivity	Molex data connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316 mW) output power
- 4 antenna ports
- Serial interface (TTL Levels)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves
- Smart appliances for home automation
- Security and access management systems

Overview

The **Lepton³x4** (Model R3104C), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 25 dBm, the reader can detect tags at more than 2 m of distance (depending on antenna and tag dimensions).


Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton³x4** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³x4** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³x4** is designed on the basis of the **Lepton³** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

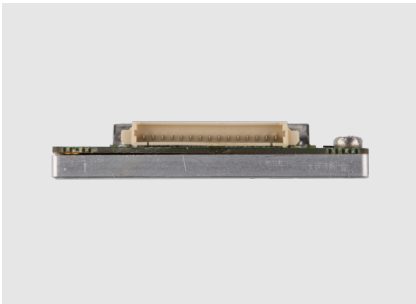

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 25 dBm (from 1 mW to 316 mW) conducted power
RX Sensitivity	-72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">4 channels (compliant to ETSI EN 302 208 v. 3.3.1)50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">UART Serial PortCommunication parameters:<ul style="list-style-type: none">Baudrate from 9.6 to 921.6 kbps, default 921.6 kbpsDatabits: 8Stopbit: 1Parity: noneFlow control: none3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">4 I/O lines 3.3 V levelIout = 8 mA max.
Power Supply	<ul style="list-style-type: none">3.2 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">800 mA @ 5 V - RF out = 25 dBm5 mA in idle mode - Ready to receive commands
Dimensions	(L)60 x (W)42 x (H)8.1 mm ³ /2.36 x 1.65 x 0.32 inches ³
Operating Temperature	-20 °C to +70 °C
Weight	34 g

Ordering Options

WR3104CXAAAA	Lepton3x4 - 25dBm Reader Module		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXVBX	Hadron, Rx101, Rx104 Eval. Board		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R3104CU

Lepton³x4-USB

25dBm 4-Port USB
RAIN RFID Reader Module

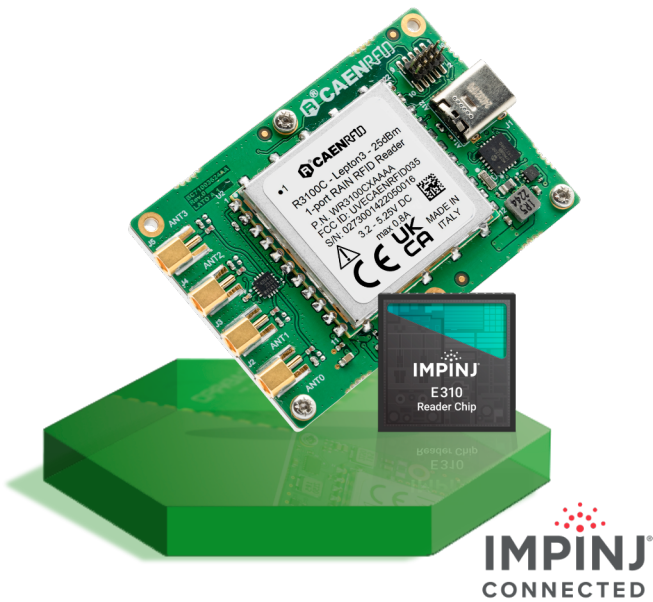

BENEFITS	Ultra compact size	High Sensitivity	USB Type-C connector	IOIOI Serial interface	MMCX antenna connector	Wide voltage range
----------	--------------------	------------------	----------------------	------------------------	------------------------	--------------------

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Ultra compact size
- Up to 25 dBm (316 mW) output power
- 4 antenna ports
- USB Type-C interface (Virtual COM)
- Low power consumption

Applications

- Handheld devices
- Multiregional label printers and applicators
- Points of sale readers
- Voice operated gloves
- Smart appliances for home automation
- Security and access management systems

Overview

The **Lepton³x4-USB** (Model R3104CU), an embedded reader of the easy2read[®] product line, is an ultra compact reader for low power, high performance RAIN RFID applications.

With programmable output power from 0 dBm to 25 dBm, the reader can detect tags at more than 2 m of distance (depending on antenna and tag dimensions).



Due to its low power consumption, the module is specifically designed to be easily integrated in battery powered devices.

The radio frequency core of the module is based on the **Impinj E310** IC that permits to achieve fast reading speed and to be used in dense reader and dense tag environments for top-class rated performances.

The compactness of the device allows to embed the **Lepton³x4-USB** inside industrial handhelds, smartphone accessories and other compact form factor devices.

The **Lepton³x4-USB** complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

The **Lepton³x4-USB** is designed on the basis of the **Lepton³** with the aim to facilitate the integration for those who prefer to use connectors instead of automatic manufacturing required by the SMD form factor.

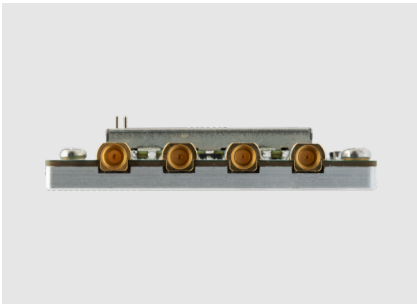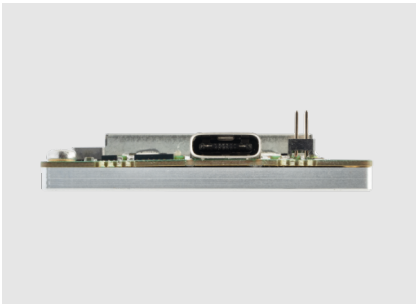

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.3.1)• 902÷928 MHz (FCC part 15.247)
RF Power	Configurable from 0 dBm to 25 dBm (from 1 mW to 316 mW) conducted power
RX Sensitivity	<ul style="list-style-type: none">• -72 dBm - 10%PER, assuming 20 dB antenna RL @ 25 dBm output
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.3.1)• 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Connectivity	<ul style="list-style-type: none">• USB Type-C Virtual COM Port• Communication parameters:<ul style="list-style-type: none">• Baudrate from 9.6 to 921.6 kbps, default 921.6 kbps• Databits: 8• Stopbit: 1• Parity: none• Flow control: none• 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">• 4 I/O lines 3.3 V level• Iout = 8 mA max.
Power Supply	<ul style="list-style-type: none">• 4.75 ÷ 5.25 V DC
Power Consumption	<ul style="list-style-type: none">• 800 mA @ 5 V - RF out = 25 dBm• 5 mA in idle mode - Ready to receive commands
Dimensions	<ul style="list-style-type: none">• (L)61 x (W)42 x (H)9.1 mm³ /2.40 x 1.65 x 0.36 inches³
Operating Temperature	-20 °C to +70 °C
Weight	34 g

Ordering Options

WR3104CUXAAA	Lepton3x4-USB - 25dBm Reader Mod.		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



R4320C

Hadron

High Performance 4-port
Embedded Reader



BENEFITS	High sensitivity	4-antenna ports	Long range readings	USB	IOIOI GP I/O	IOIOI Serial interface

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) compliant
- Multiregional support
- Four 50 Ohm MMCX antenna connectors
- Up to 31.5 dBm (1.4 W) output power
- USB Full Speed interface
- Serial interface (TTL Levels)

Applications

- High performance handheld and sleds
- Points of sale readers
- Self-service kiosk
- Industrial automation readers
- Full portal readers
- Long range reading points

Overview

The **Hadron** (Model R4320C), embedded module of the easy2read® product line, is a RAIN RFID multiregional compact reader for high performance applications. With programmable output power from 10 dBm to 31.5 dBm, the reader reaches top reading performances being able to detect RAIN tags from a distance of 9 m (30 feet) depending on the antenna and the tag used.

The radio frequency core of the module allows to achieve fast reading/writing operations and to work in dense reader and dense tag environments for top-class rated performances.

Due to its compact form factor, the **Hadron** module is specifically designed to be easily embedded in battery powered devices such as high performance handhelds and sleds. Thanks to the 4-antenna ports and the high power capability, the **Hadron** module is the perfect RAIN RFID core component to design full size readers for portals, industrial automation readers or any RFID device requiring long reading distances.


The **Hadron** reader complies with and can operate in both European and US regulatory environments and, thanks to its multiregional capabilities, it's ideal for integration in devices requiring compliance to different geographical regions.

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• 865.600÷867.600 MHz (ETSI EN 302 208 v. 3.1.1)• 902÷928 MHz (FCC part 15.247)
RF Power	<ul style="list-style-type: none">• Up to 31.5 dBm (1.4 W) conducted (ETSI)• Up to 30 dBm (1 W) conducted (FCC)
RX Sensitivity	-84 dBm – 10%PER, assuming 20 dB antenna RL @ 31.5 dBm output
Output Power Accuracy	± 1 dB
Antenna VSWR Requir.	< 2:1 for optimal performance
Antenna Connectors	4 MMCX jacks
Frequency Tolerance	± 10 ppm over the entire temperature range
Number of Channels	<ul style="list-style-type: none">• 4 channels (compliant to ETSI EN 302 208 v. 3.1.1)• 50 hopping channels (compliant to FCC part 15.247)
Standard Compliance	EPC Class 1 Gen 2 - ISO18000-63
Receiving Capability	<ul style="list-style-type: none">• Gen 2 Dense Reader Mode Management• Data rate up to 400 kbit/s
Forward Link Charact.	<ul style="list-style-type: none">• PR-ASK 40 kbit/s• DSB-ASK 160 kbit/s (FCC only)
Return Link Charact.	<ul style="list-style-type: none">• Miller encoding: M=4 - LF=250 kHz• Miller encoding: M=4 - LF=300 kHz• FM0 400 kbit/s (FCC only)
Connectivity	<ul style="list-style-type: none">• USB Interface: USB 2.0 Full Speed (12 Mbit/s) device port• UART Serial Port:<ul style="list-style-type: none">• Baudrate up to 115.200 kbit/s• Databits: 8• Stopbit: 1• Parity: none• Flow control: none• 3.3 V I/O voltage level
I/O Interface	<ul style="list-style-type: none">• 4 I/O lines 3.3 V out @ 3 mA• 5 V tolerant
Power Supply	<ul style="list-style-type: none">• 5 V DC ÷ 5.5 V DC• 8.5 W peak power consumption (TX/RX active)
Dimensions	<ul style="list-style-type: none">• (W)60 x (L)42 x (H)7.5 mm³• 2.36 x 1.65 x 0.29 inches³
Operating Temperature	-20 °C to +60 °C
Weight	35 g

Ordering Options


WR4320CXAAAA	Hadron - Hi-Perf. Embedded Reader		
WR4320CXDKU	Hadron, Rx101, Rx104 - ETSI Dev. Kit		
WR4320CXDKUS	Hadron, Rx101, Rx104 - FCC Dev. Kit		
WR4320CXEVBX	Hadron, Rx101, Rx104 Eval. Board		

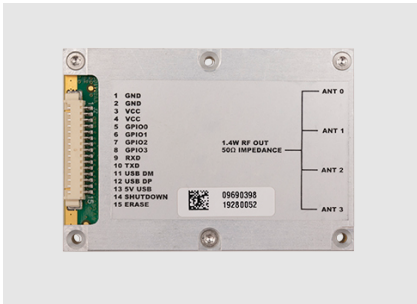

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraila, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com

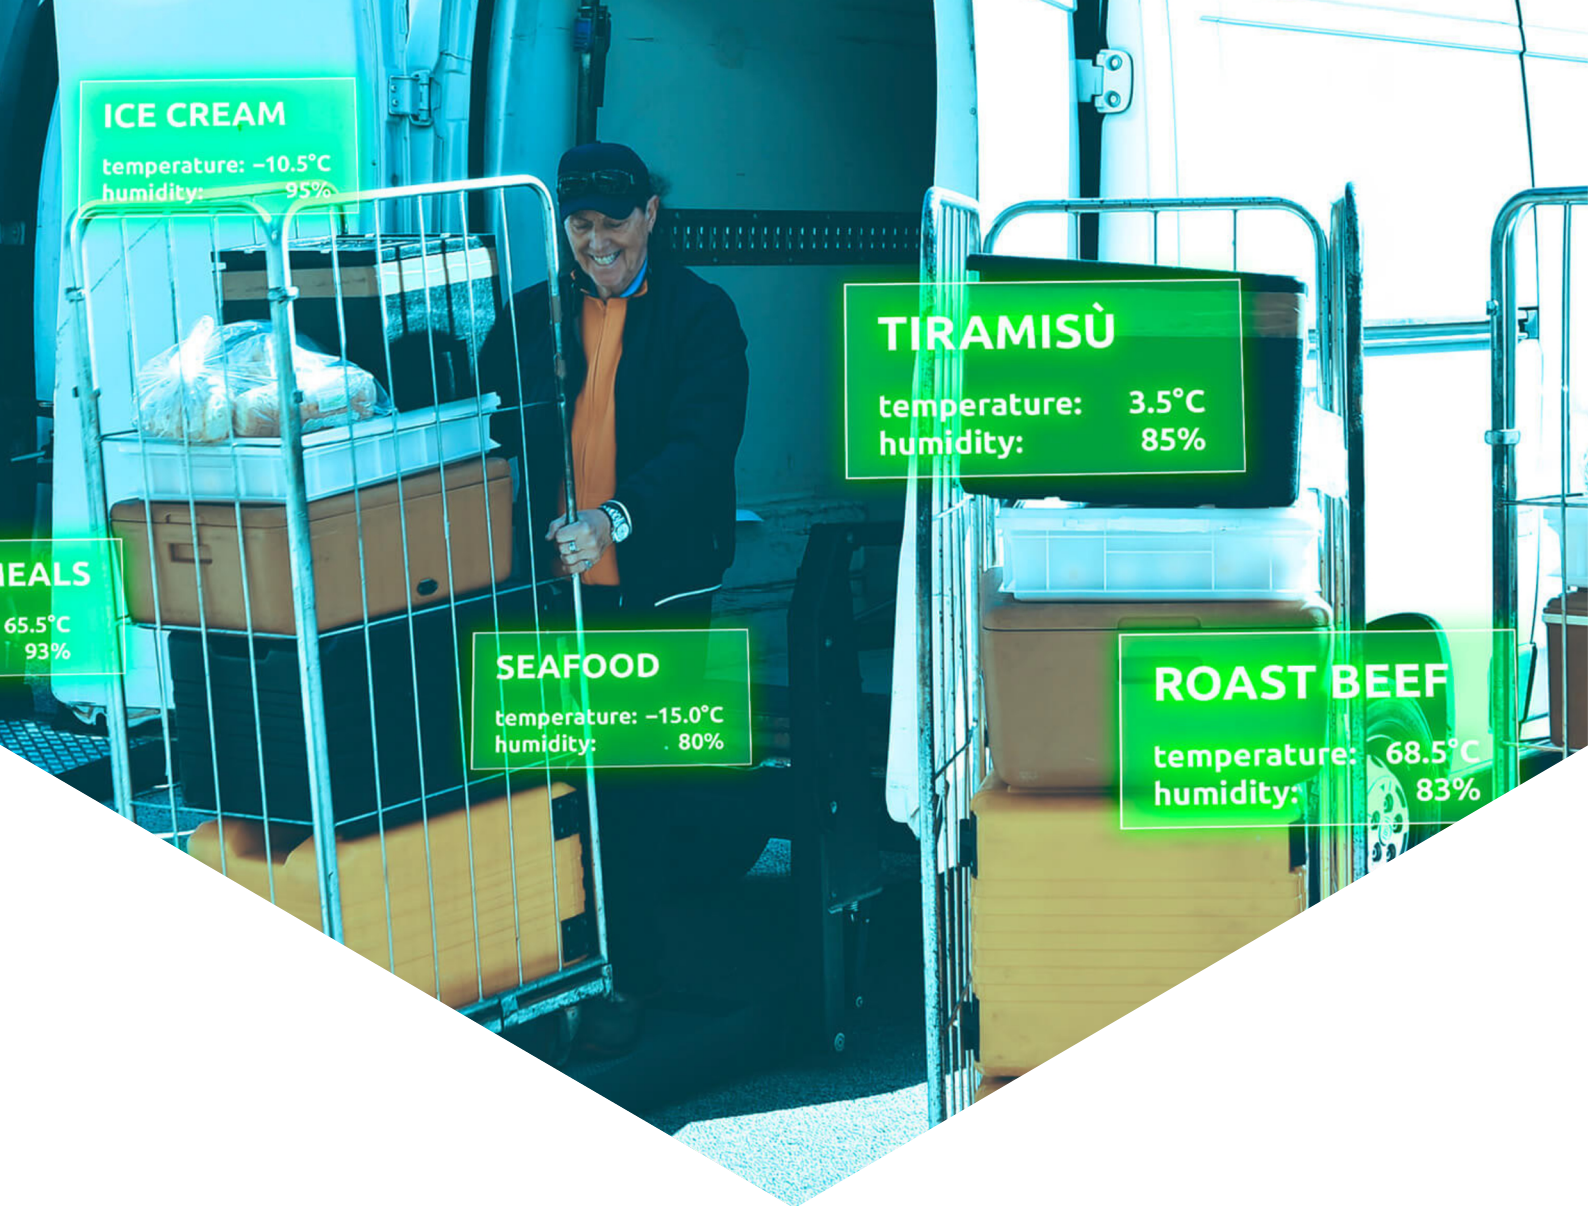

Temperature Loggers

Temperature Loggers

Vaccines, drugs and clinical trial products need to be shipped within a prescribed temperature range to maintain their efficacy as well as food to maintain freshness.

The benefits of applying RFID and sensors to perishable goods include improved food and drugs safety, longer vaccines and drugs efficacy, more efficient product recalls, reduced costs due to less spoilage, lower inventories, more efficient logistics, and improved customer service.

easy2log® products allow to have a complete history of the temperature exposure of your perishable goods thus allowing a complete control of the Cold Chain and to predict the remaining shelf life.



RT0012

qLog
TEMPERATURE

Dual Frequency RAIN/NFC
Data Logger Tag



BENEFITS

Dual frequency
RAIN/NFC

High temperature
and time accuracy

Rugged and slim

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) interface
- NFC ISO 14443 Type A interface
- High temperature and time accuracy
- Fast samples download
- Configurable alarms
- Configurable sampling interval
- Long monitoring time span

Applications

- Fresh food
- Seafood
- Meat and poultry
- Milk based products
- Frozen food
- Pharmaceuticals
- Special chemical products
- Clinical trials

Overview

CAEN RFID **qLog**_{TEMPERATURE} (RT0012) is a low cost, semi-passive NFC/RAIN RFID temperature logger that allows to monitor temperature sensitive products like perishable foods and pharmaceuticals during transportation and storage. The combination of the high resolution sensor, the large memory size and the standard NFC/RAIN RFID interfaces permit to realize effective track and trace solutions for the cold-chain.

The RAIN RFID interface is ideal for reading temperature data or alarms from distance allowing automated check-points on conveyors or through dock doors. The NFC interface permits a very easy interaction with any NFC enabled smartphone allowing the consumer to check the good condition at home.

The **qLog**_{TEMPERATURE} can be configured to store temperature samples in intervals from 5 second to 18 hours in the internal memory that can contain up to 4,096 samples. The user can define up to 16 temperature ranges with independent threshold alarms for a very accurate control of the temperature excursions.

The rugged enclosure and the compact size permit to use the logger in various applications and the passive radiofrequency behaviour does not prevent air shipments.


The **qLog**_{TEMPERATURE} RFID logger can be used for multiple shipments thanks to the long battery life and the reset function allowing to reduce the total cost of a single monitored shipment and anticipate the ROI of the solution.

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• NFC/HF: 13.56 MHz• RAIN/UHF: 860÷930 MHz
RFID Protocols	<ul style="list-style-type: none">• NFC/RFID ISO 14443 Type A Interface• RAIN : EPC Class 1 Gen 2 - ISO18000-63
Tag Type	Semipassive
Data Points	Up to 4,096 samples
Temperature Range	-30 °C to +70 °C
Temperature Accuracy	± 0.5 °C
Monitoring Time Span	Up to 5 years
Time Accuracy	< 0.02% error (typical)
Read Range	<ul style="list-style-type: none">• NFC/HF: up to 5 cm• RAIN/UHF: up to 5 m in free air @ 2 W ERP
Available Memory	Up to 160 bits in EPC memory bank and up to 448 bits available for user
Monitoring Delay Option	Up to 18 hours
Features	<ul style="list-style-type: none">• Multiple configurable sampling interval• Temperature histogram function• Configuration and start accessible both from NFC and RAIN interface• Samples download accessible both from NFC and RAIN interface• User accessible memory shared between NFC and RAIN
Alarms	<ul style="list-style-type: none">• Multiple configurable high and low temperature thresholds• Estimated Time of Arrival• Battery Level
Battery Life	1 year typical (depending on usage and operating temperature)
Battery Type	Li/MnO2 Model Renata CR2430SN
IP rating	IP68
Enclosure Material	ABS
Dimensions	<ul style="list-style-type: none">• (W)92 x (L)63 x (H)6.5 mm³ max.• 3.62 x 2.48 x 0.25 inches³
Weight	35 g

Ordering Options

WRT0012XAAAA	qLog - Temperature version		

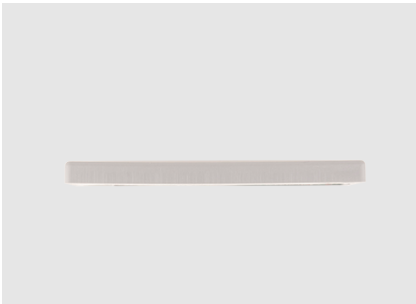

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



RT0013

qLog
HUMIDITY

Dual Frequency RAIN/NFC
Data Logger Tag



BENEFITS	Dual frequency RAIN/NFC	High temperature and time accuracy	Rugged and slim		
----------	----------------------------	---------------------------------------	-----------------	--	--

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) interface
- NFC ISO 14443 Type A interface
- High temperature and time accuracy
- Fast samples download
- Configurable alarms
- Configurable sampling interval
- Long monitoring time span

Applications

- Fresh food
- Seafood
- Meat and poultry
- Milk based products
- Frozen food
- Pharmaceuticals
- Special chemical products
- Clinical trials

Overview

CAEN RFID **qLog**_{HUMIDITY} (RT0013) is a low cost, semi-passive NFC/RAIN RFID temperature and humidity logger that allows to monitor temperature and humidity sensitive products. The combination of the high resolution sensor, the large memory size and the standard NFC/RAIN RFID interfaces permit to realize effective track and trace solutions for the cold-chain.

The RAIN RFID interface is ideal for reading temperature data or alarms from distance allowing automated check-points on conveyors or through dock doors. The NFC interface permits a very easy interaction with any NFC enabled smartphone allowing the consumer to check the good condition at home.

The **qLog**_{HUMIDITY} can be configured to store temperature and humidity samples in intervals from 5 second to 18 hours in the internal memory that can contain up to 4,096 samples. The user can define up to 16 temperature and humidity ranges with independent threshold alarms for a very accurate control of the temperature and humidity excursions.

The rugged enclosure and the compact size permit to use the logger in various applications and the passive radiofrequency behaviour does not prevent air shipments.


The **qLog**_{HUMIDITY} RFID logger can be used for multiple shipments thanks to the long battery life and the reset function allowing to reduce the total cost of a single monitored shipment and anticipate the ROI of the solution.

Technical Specification Table

Frequency Range	<ul style="list-style-type: none">• NFC/HF: 13.56 MHz• RAIN/UHF: 860÷930 MHz
RFID Protocols	<ul style="list-style-type: none">• NFC/RFID ISO 14443 Type A Interface• RAIN : EPC Class 1 Gen 2 - ISO18000-63
Tag Type	Semipassive
Data Points	Up to 4,096 samples
Temperature Range	-30 °C to +70 °C
Temperature Accuracy	±0.5 °C
Humidity Range	0 to 100% relative humidity range
Humidity Accuracy	± 3.5% rH, 20 to +80% rH
Monitoring Time Span	Up to 5 years
Time Accuracy	< 0.02% error (typical)
Read Range	<ul style="list-style-type: none">• NFC/HF: up to 5 cm• RAIN/UHF: up to 5 m in free air @ 2W ERP
Available Memory	Up to 160 bits in EPC memory bank and up to 448 bits available for user
Monitoring Delay Option	Up to 18 hours
Features	<ul style="list-style-type: none">• Multiple configurable sampling interval• Humidity and temperature histogram function• Configuration and start accessible both from NFC and RAIN interface• Samples download accessible both from NFC and RAIN interface• User accessible memory shared between NFC and RAIN
Alarms	<ul style="list-style-type: none">• Multiple configurable high and low temperature/humidity thresholds• Estimated Time of Arrival• Battery Level
Battery Life	1 year typical (depending on usage and operating temperature)
Battery Type	Li/MnO2 Model Renata CR2430SN
IP rating	IP68
Enclosure Material	ABS
Dimensions	<ul style="list-style-type: none">• (W)92 x (L)63 x (H)6.5 mm³ max.• 3.62 x 2.48 x 0.25 inches³
Weight	35 g

Ordering Options

WRT0013XAAAA	qLog - Humidity version		

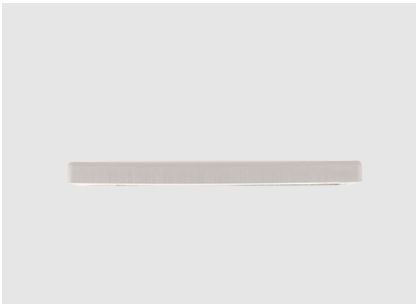

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



RT0005

RT0005

RAIN RFID Temperature Logger Tag



BENEFITS	High temperature and time accuracy	Button and LED	Thin form factor	Configurable alarms		
----------	------------------------------------	----------------	------------------	---------------------	--	--

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) interface
- High temperature and time accuracy
- Fast samples download
- Button and LED for fast inspection
- Configurable alarms
- Configurable sampling interval
- Long monitoring time span

Applications

- Fresh food
- Seafood
- Meat and poultry
- Milk based products
- Frozen food
- Pharmaceuticals
- Special chemical products
- Clinical trials

Overview

CAEN RFID easy2log® **RT0005** is a low cost, semi-passive UHF Logger tag that allows to monitor temperature sensitive products like perishable foods and pharmaceuticals, during transportation and storage. The combination of the high resolution sensor, the large memory size and the standard RFID interface permits to realize effective track and trace solutions for the cold-chain.

The **RT0005** can be used with standard RAIN RFID readers available on the market without requiring any additional equipment thanks to its compatibility with the EPCGlobal C1G2 and ISO18000-63 standards.

The tag can be configured to store temperature samples in intervals from 1 second to 18 hours in the internal memory that can contain up to 3,958 samples. The user can define up to 16 temperature ranges with independent threshold alarms for a very accurate control of the temperature excursions. The tag can be started either using a button or via standard RFID commands.

The tag is also able to calculate the Mean Kinetic Temperature and user configurable remaining shelf life time as well as generate alarms in case these parameters exceeded user defined thresholds.

The **RT0005** RFID logger can be used for multiple shipments thanks to the long battery life and the reset function thus allowing to reduce the total cost of the solution and anticipate the ROI.

Technical Specification Table

Frequency Range	860÷928 MHz
Tag Type	Semipassive
RFID Interface	EPC Class 1 Gen 2 - ISO18000-63
Data Points	Up to 3,958 samples
Temperature Operating Range	-20 °C to +70 °C
Temperature Accuracy	±0.5 °C typical
Monitoring Time Span	Up to 5 years
Time Accuracy	< 0.01% error
Read Range	Up to 10 m in free air @ 2W ERP
Available Memory	<ul style="list-style-type: none">• Up to 512 bits in EPC memory bank• Up to 512 bits in User Memory bank
Monitoring Delay Option	Up to 18 hours
Features	<ul style="list-style-type: none">• Multiple configurable sampling interval• Temperature histogram function• Mean Kinetic Temperature calculation• Shelf Life prediction (Arrhenius kinetic model with customer designation of time-temperature dependency)• Shelf Life monitoring (Remaining Shelf Life information available ate check points or manual interface)
Alarms	<ul style="list-style-type: none">• Multiple configurable high and low temperature thresholds• Estimated Time of Arrival• Battery level• Mean Kinetic Temperature• Shelf life
Battery Life	1 year typical (depending on usage and operating temperature)
Battery Type	Li/MnO2 Model Renata CR2450N
IP rating	IP67
Enclosure Material	PVC Tecnovil code: 21TV306TRS00000
Dimensions	<ul style="list-style-type: none">• (W)107 x (L)107 x (H)8.7 mm³ max.• 4.21 x 4.21 x 3.42 inches³
Weight	31 g

Ordering Options

WRT0005XAAAA	RT0005 - Temperature Logger Tag		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



A927Z

A927Z

Rugged RAIN RFID Temperature Logger Tag



BENEFITS

Rugged

High temperature and time accuracy

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) interface
- High temperature and time accuracy
- Fast samples download
- Configurable alarms
- Configurable sampling interval
- Long monitoring time span

Applications

- Fresh food
- Seafood
- Meat and poultry
- Milk based products
- Frozen food
- Pharmaceuticals
- Special chemical products
- Clinical trials

Overview

CAEN RFID easy2log® **A927Z** is a low cost, rugged, semipassive RAIN RFID logger tag that allows to monitor temperature sensitive products like perishable foods and pharmaceuticals, during transportation and storage. The combination of the high resolution sensor, the large memory size and the standard RFID interface permits to realize effective track and trace solutions for the cold-chain.

The **A927Z** can be used with standard RAIN RFID readers available on the market without requiring any additional equipment thanks to its compatibility with the EPCGlobal C1G2 and ISO18000-63 standards.

The tag can be configured to store temperature samples in intervals from 8 seconds to 18 hours in the internal memory that can contain up to 8,000 samples. The user can define alarms for high and low temperature thresholds for an accurate control of the temperature excursions.

The rugged enclosure of this logger make it the perfect choice for the cold-chain monitoring in harsh environment or in presence of strong vibration.



The **A927Z** RFID logger can be used for multiple shipments thanks to the long battery life and the reset function thus allowing to reduce the total cost of the solution and anticipate the ROI.

Technical Specification Table

Frequency Range	860÷928 MHz
Tag Type	Semipassive
RFID Interface	EPC Class 1 Gen 2 - ISO18000-63
Data Points	Up to 8,000 samples
Temperature Operating Range	-20 °C to +70 °C
Temperature Accuracy	±0.5 °C typical
Monitoring Time Span	Up to 5 years
Time Accuracy	< 0.01% error
Read Range	<ul style="list-style-type: none">Up to 10 m in free air @ 2W ERPUp to 2.5 m on metal @ 2W ERP
Available Memory	<ul style="list-style-type: none">512 bits in EPC memory bank17,484 bytes in User memory bank208 bits in TID memory bank512 bits in Reserved memory bank
Alarms	Multiple configurable high and low temperature thresholds
Operating Temperature	-30 °C to +70 °C
Storage Temperature	-40 °C to +85 °C
Absolute Temperature Range	-40 °C to +70 °C
Temperature Resolution	±0.1 °C
Battery Life	3 year typical (depending on usage and operating temperature)
Battery Type	Li/MnO2 Model Renata CR2450N
IP rating	IP67
Dimensions	<ul style="list-style-type: none">(W)130.4 x (L)23.4 x (H)12.7 mm³ max.51.33 x 9.21 x 5.00 inches³
Weight	35 g

Ordering Options

WA927ZAAAAAA	A927Z - Rugged Temp. Logger Tag		

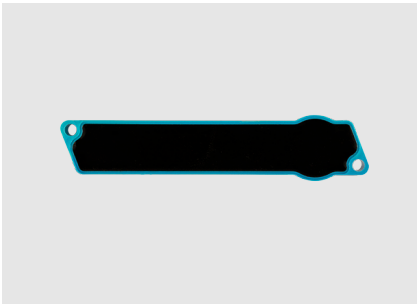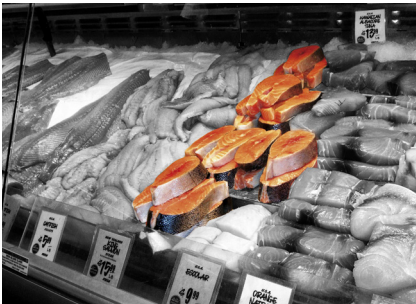

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



A927ZET

A927ZET

Rugged RAIN RFID Temperature
Logger Tag with External Probe



BENEFITS	External probe	Rugged	High temperature and time accuracy		
----------	----------------	--------	---------------------------------------	--	--

Features

- RAIN RFID (UHF EPC Class1 Gen2, ISO 18000-63) interface
- High temperature and time accuracy
- Fast samples download
- Configurable alarms
- Configurable sampling interval
- Long monitoring time span

Applications

- Fresh food
- Seafood
- Meat and poultry
- Milk based products
- Frozen food
- Pharmaceuticals
- Special chemical products
- Clinical trials

Overview

CAEN RFID easy2log® **A927ZET** is a low cost, rugged, semipassive RAIN RFID logger tag that allows to monitor temperature sensitive products like perishable foods and pharmaceuticals, during transportation and storage. The combination of the high resolution sensor, the large memory size and the standard RFID interface permits to realize effective track and trace solutions for the cold-chain.

The **A927ZET** can be used with standard RAIN RFID readers available on the market without requiring any additional equipment thanks to its compatibility with the EPCGlobal C1G2 and ISO18000-63 standards.

The tag can be configured to store temperature samples in intervals from 8 seconds to 18 hours in the internal memory that can contain up to 4,096 samples per sensor. For each sensor the user can define alarms for high and low temperature thresholds for an accurate control of the temperature excursions.

The rugged enclosure of this logger make it the perfect choice for the cold-chain monitoring in harsh environment or in presence of strong vibration while the external sensor probe allows to monitor the internal and the external temperature of a box.

The **A927ZET** RFID logger can be used for multiple shipments thanks to the long battery life and the reset function thus allowing to reduce the total cost of the solution and anticipate the ROI.



Technical Specification Table

Frequency Range	860÷928 MHz
Tag Type	Semipassive
RFID Interface	EPC Class 1 Gen 2 - ISO18000-63
Data Points	Up to 4,096 samples per sensor
Temperature Operating Range	-20 °C to +70 °C
Temperature Accuracy	±0.5 °C typical
Monitoring Time Span	Up to 5 years
Time Accuracy	< 0.01% error
Read Range	<ul style="list-style-type: none">• Up to 10 m in free air @ 2W ERP• Up to 2.5 m on metal @ 2W ERP
Available Memory	<ul style="list-style-type: none">• 512 bits in EPC memory bank• 17,484 bytes in User memory bank• 208 bits in TID memory bank• 512 bits in Reserved memory bank
Alarms	Multiple configurable high and low temperature thresholds
Operating Temperature	<ul style="list-style-type: none">• -30 °C to +70 °C (internal sensor)• -20 °C to +70 °C (external sensor)
Storage Temperature	<ul style="list-style-type: none">• -40 °C to +85 °C (internal sensor)• -40 °C to +85 °C (external sensor)
Absolute Temperature Range	<ul style="list-style-type: none">• -40 °C to +70 °C (internal sensor)• -20 °C to +70 °C (external sensor)
Temperature Resolution	± 0.1 °C
Battery Life	3 year typical (depending on usage and operating temperature)
Battery Type	Li/MnO2 Model Renata CR2450N
IP rating	IP67
Dimensions (external probe excluded)	<ul style="list-style-type: none">• (W)130.4 x (L)23.4 x (H)12.7 mm³ max.• 51.33 x 9.21 x 5.00 inches³
Weight	48 g

Ordering Options


WA927ZETAAAA	A927ZET - with External Probe		



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com

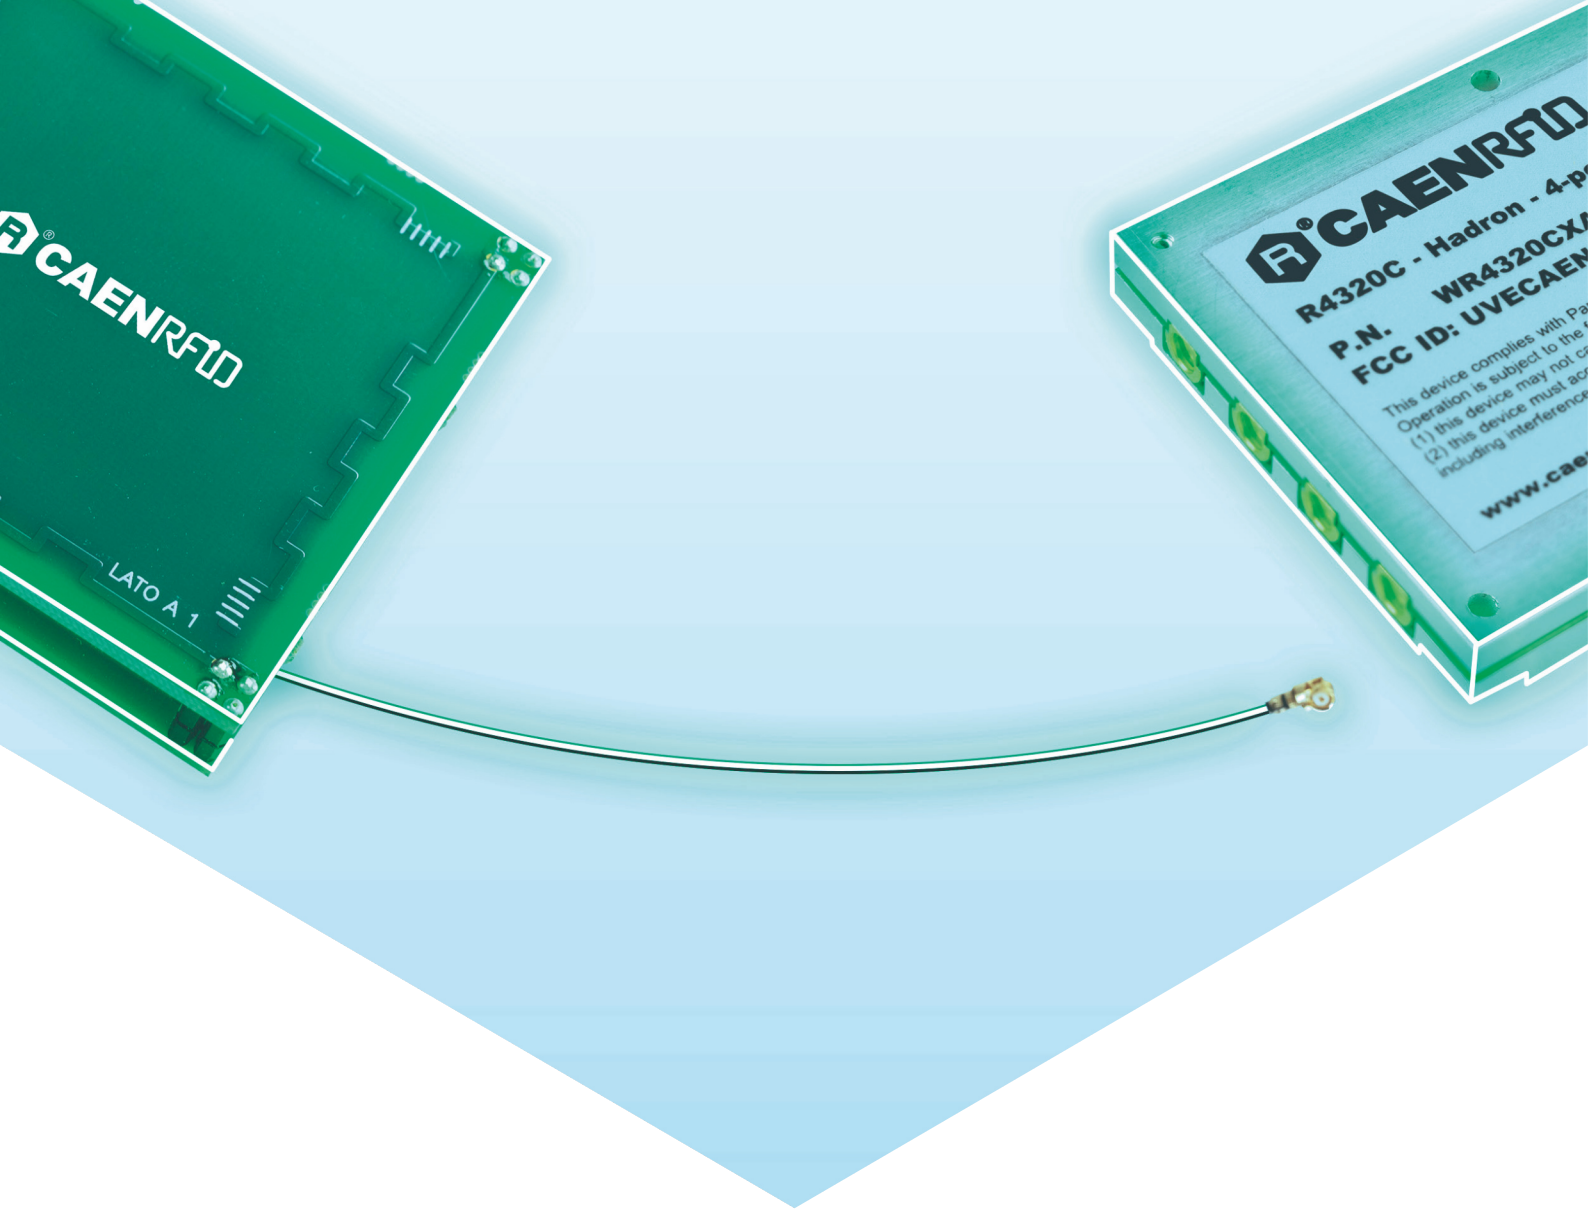

Reader

Accessories

Reader Accessories

CAEN RFID offers a set of accessories to enrich the features and performance of RAIN RFID readers.

Available accessories include RFID antennas, I/O interfaces, antenna multiplexer, development boards, antenna cables and power supplies.



WANTENNAX019

WANTENNAX019

Circular Polarized Antenna
8.5dBc - ETSI



Overview

This antenna is designed for RAIN RFID long range application like portals, vehicles identification, access control or waste management.

Thanks to the circular polarization, the tag read range is independent from the relative tag – antenna orientation.

The enclosure is IP65 rated for outdoor installation.

Features

- Designed for RAIN RFID long range applications
- Frequency Range 865÷868 MHz
- Gain 8.5 dBc
- Right Hand Circularly Polarized (RHCP)

Technical Specification Table


Frequency Range	865÷868 MHz (ETSI EN 302 208 v. 3.1.1)
Polarization	Right Hand Circularly Polarized (RHCP)
Gain	8.5 dBc
Half-Power Beamwidth (3dB)	65° Elevation - 65° Azimuth (3dB)
Front-to-Back Ratio	17 dB
Axial Ratio at Boresight	2 dB
VSWR	1.1:1
Nominal Impedance	50 Ohm
Power	2 W ERP (ETSI EN 302 208 v3.1.1) - Max. 5 W
Lightning Protection	Capacitor feed system
Dimensions	• (L) 270 x (W) 270 x (D) 75 mm ³ • 10.63 x 10.63 x 2.95 inches ³
Weight	1.2 kg
Connector	N-f with 30 cm RG58 cable
Radome	Polystyrene plastic (UV rating)
Mounting Kit	Aluminum (for pole)
IP Rating	IP65
Operating Temperature	-30 °C to +60 °C
Storage Temperature	-30 °C to +60 °C
Wind Surface	0.066 m ²

Ordering Options


WANTENNAX019	ETSI Circular Polarized Antenna 8.5 dBc		
--------------	---	--	--

Details


Total Gain - Azimuth

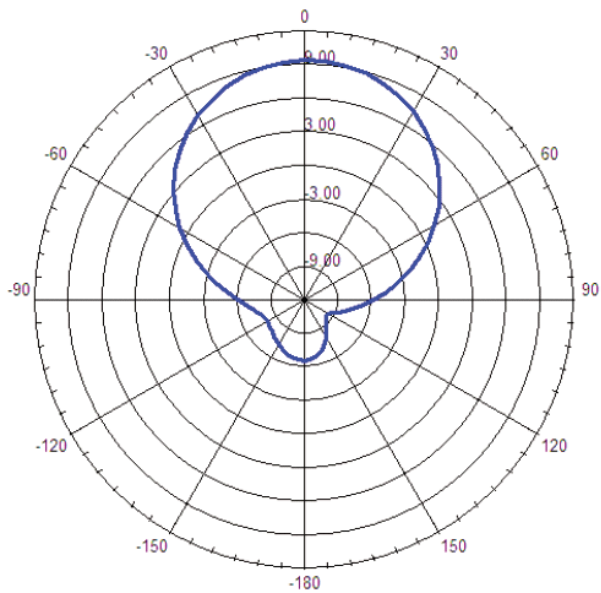

Total Gain - Elevation

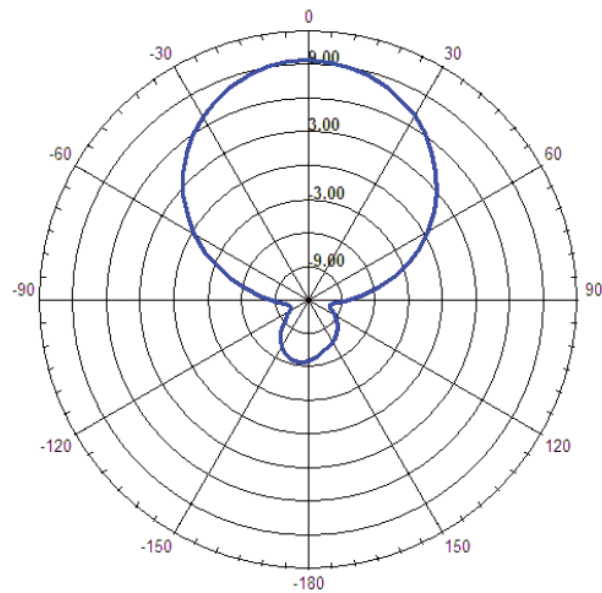

VSWR vs Frequency

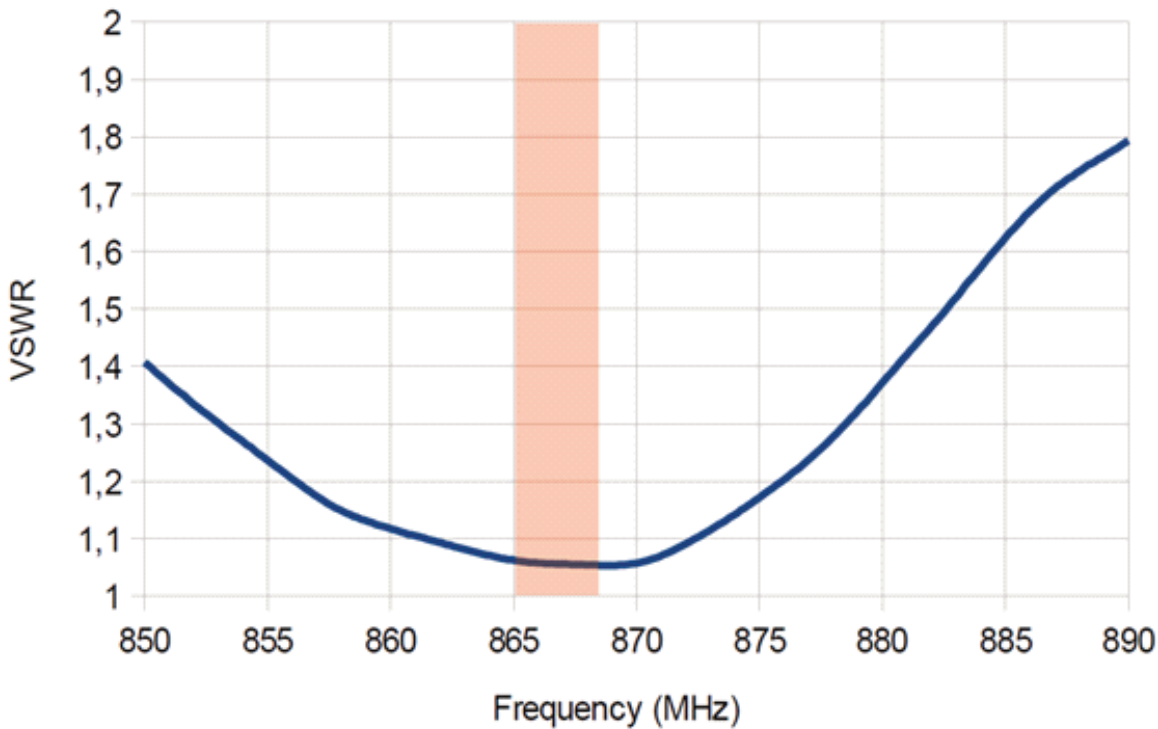

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



WANTENNAX020

WANTENNAX020

Circular Polarized Antenna
8.5dBc - FCC



Overview

This antenna is designed for RAIN RFID long range application like portals, vehicles identification, access control or waste management.

Thanks to the circular polarization, the tag read range is independent from the relative tag – antenna orientation.

The enclosure is IP65 rated for outdoor installation.

Features

- Designed for RAIN RFID long range applications
- Frequency Range 902÷928 MHz
- Gain 8.5 dBc
- Right Hand Circularly Polarized (RHCP)

Technical Specification Table


Frequency Range	902÷928 MHz (FCC part 15.247)
Polarization	Right Hand Circularly Polarized (RHCP)
Gain	8.5 dBc
Half-Power Beamwidth (3dB)	65° Elevation - 65° Azimuth (3dB)
Front-to-Back Ratio	15 dB
Axial Ratio at Boresight	2.5 dB
VSWR	1.3:1
Nominal Impedance	50 Ohm
Power	2 W EIRP (FCC part 15.247) - Max. 5 W
Lightning Protection	Capacitor feed system
Dimensions	• (L) 270 x (W) 270 x (D) 75 mm ³ • 10.63 x 10.63 x 2.95 inches ³
Weight	1.2 kg
Connector	N-f with 30 cm RG58 cable
Radome	Polystyrene plastic (UV rating)
Mounting Kit	Aluminum (for pole)
IP Rating	IP65
Operating Temperature	-30 °C to +60 °C
Storage Temperature	-30 °C to +60 °C
Wind Surface	0.066 m ²

Ordering Options


WANTENNAX020	FCC Circular Polarized Antenna 8.5 dBc		
--------------	--	--	--

Details


Total Gain - Azimuth

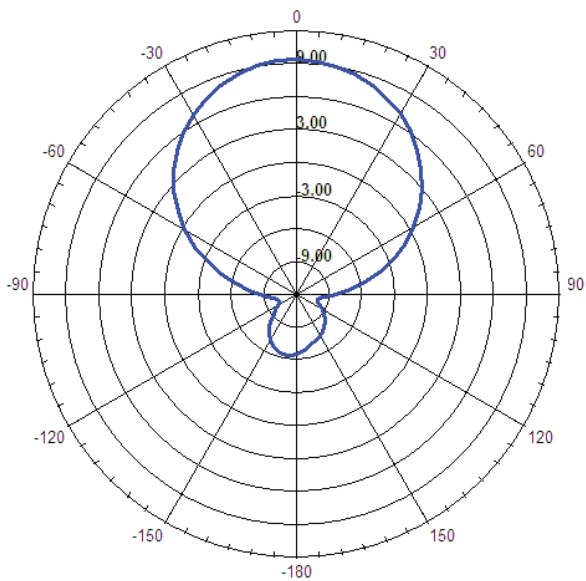

Total Gain - Elevation

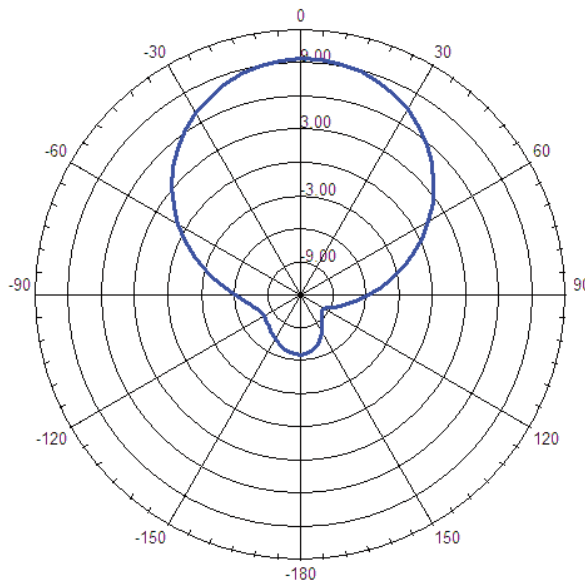

VSWR vs Frequency

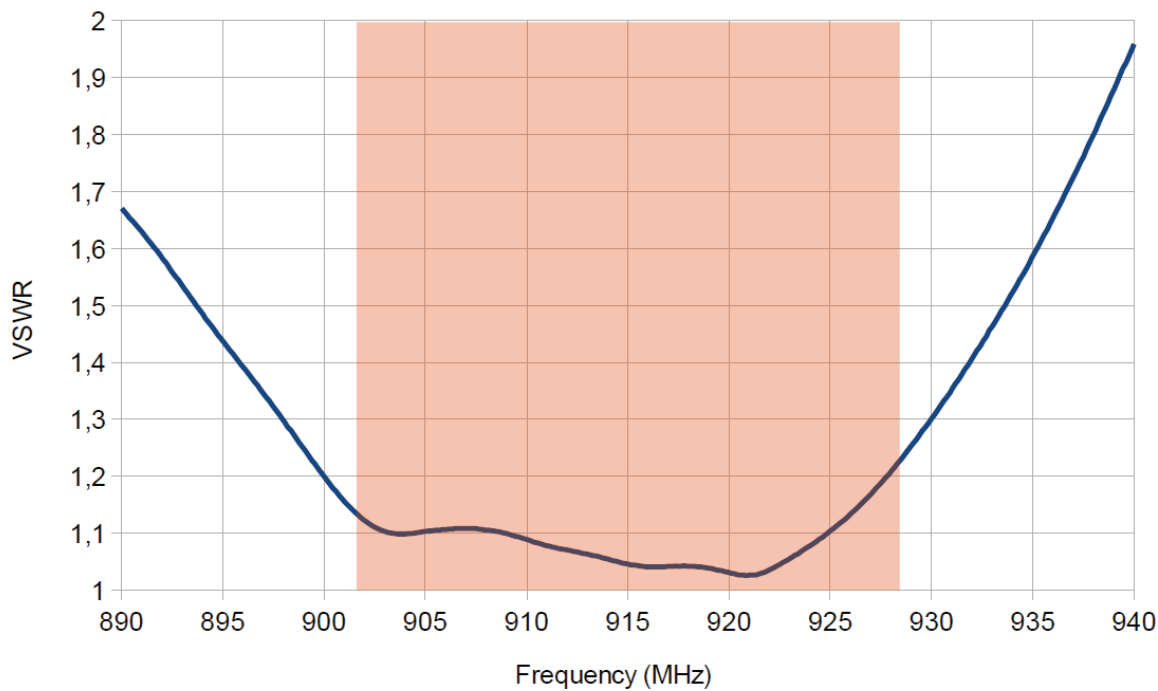

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



WANT020IP

Quad^{IP}

Circular Polarized Compact Antenna (ETSI)



Overview

The **Quad^{IP}** is a medium-short range RAIN RFID antenna in a compact and robust form factor.

The **Quad^{IP}** antenna is well suited for building small RFID gates, read point for access control or to be installed on conveyors in industrial environments.

The high IP rating (IP67) permits to install the **Quad^{IP}** antenna for outdoor solution or in harsh environments.

Thanks to the circular polarization, the reading range is not affected by the tag orientation.

Features

- *Designed for RAIN RFID short/medium range applications*
- *Frequency Range 865.6÷867.6 MHz*
- *Gain 0.2 dBi*
- *Circular Polarization*

Technical Specification Table


Frequency Range	865.6÷867.6 MHz (ETSI EN 302 208 v. 3.1.1)
Polarization	Right Hand Circularly Polarized (RHCP)
Gain	0.2 dBi typical
Axial Ratio	1 dB typical
VSWR	<1.5:1
Nominal Impedance	50 Ohm
Dimensions	• (L) 100 x (W) 100 x (D) 25 mm ³ • 3.94 x 3.94 x 0.98 inches ³
RF Connector	SMA jack female, straight
Radome	Flame-resistant ABS UL94V-0
Color	Charcoal gray
Weight	140 g
Operating Temperature	• -25 °C to +70 °C • -13 °F to +158 °F
IP Rating	IP67
Material Substance Compliance	RoHS compliant

Ordering Options


WANT020IPXXA	QuadIP - ETSI		
--------------	---------------	--	--

Details

Antenna Gain

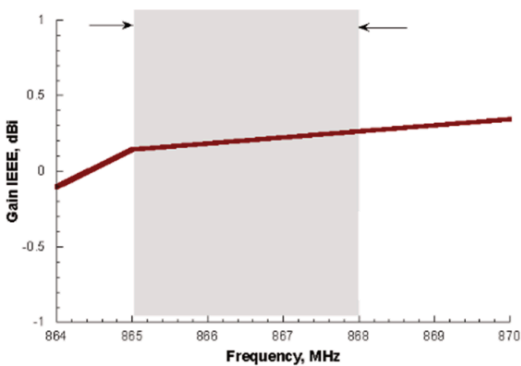


Axial Ratio


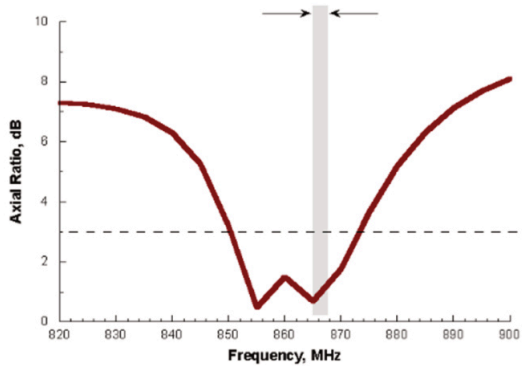


Radiation Patterns

phi = 0

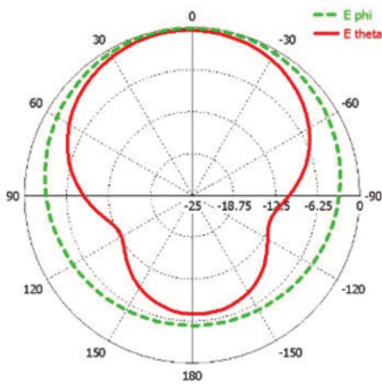

phi = 90

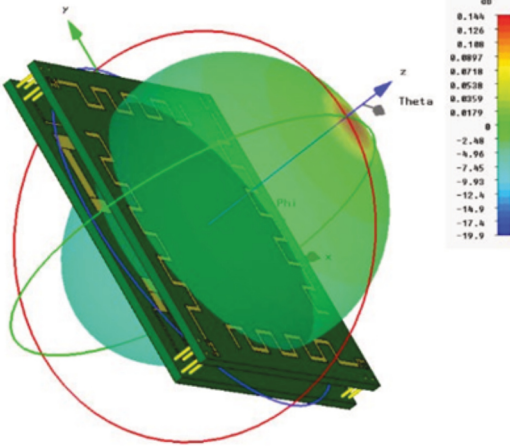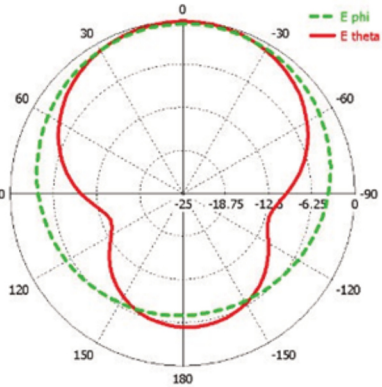

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



WANT021IP

QuadIP

Circular Polarized Compact Antenna (FCC)



Overview

The **QuadIP** is a medium-short range RAIN RFID antenna in a compact and robust form factor.

The **QuadIP** antenna is well suited for building small RFID gates, read point for access control or to be installed on conveyors in industrial environments.

The high IP rating (IP67) permits to install the **QuadIP** antenna for outdoor solution or in harsh environments.

Thanks to the circular polarization, the reading range is not affected by the tag orientation.

Features

- Designed for RAIN RFID short/medium range applications
- Frequency Range 902÷928 MHz
- Gain 0.7 dBi
- Circular Polarization

Technical Specification Table


Frequency Range	902÷928 MHz (FCC part 15.247)
Polarization	Right Hand Circularly Polarized (RHCP)
Gain	0.7 dBi typical
Axial Ratio	1 dB typical
VSWR	<1.5:1
Nominal Impedance	50 Ohm
Dimensions	<ul style="list-style-type: none">• (L) 100 x (W) 100 x (D) 25 mm³• 3.94 x 3.94 x 0.98 inches³
RF Connector	SMA jack female, straight
Radome	Flame-resistant ABS UL94V-0
Color	Charcoal gray
Weight	140 g
Operating Temperature	<ul style="list-style-type: none">• -25 °C to +70 °C• -13 °F to +158 °F
IP Rating	IP67
Material Substance Compliance	RoHS compliant

Ordering Options


WANT021IPXXA	QuadIP - FCC		
--------------	--------------	--	--

Details




Antenna Gain

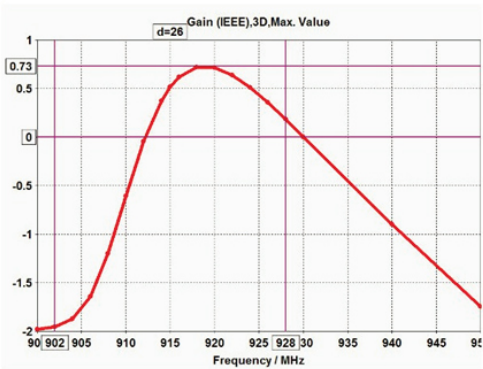

Axial Ratio

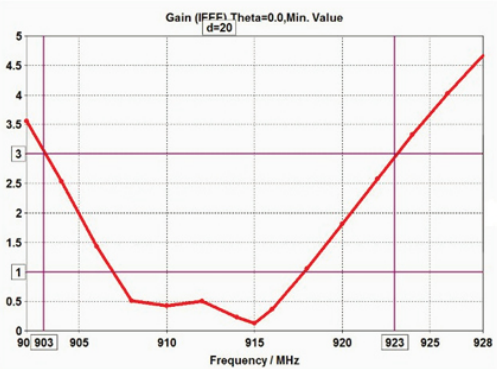

Radiation Patterns

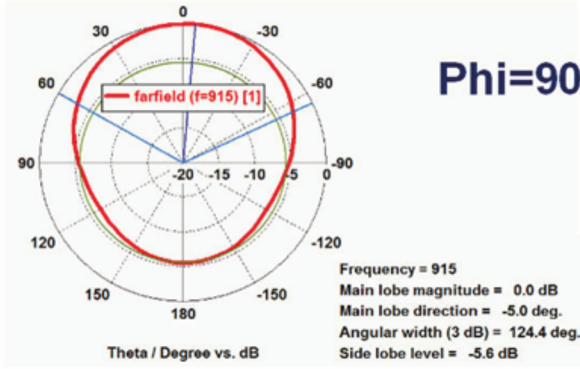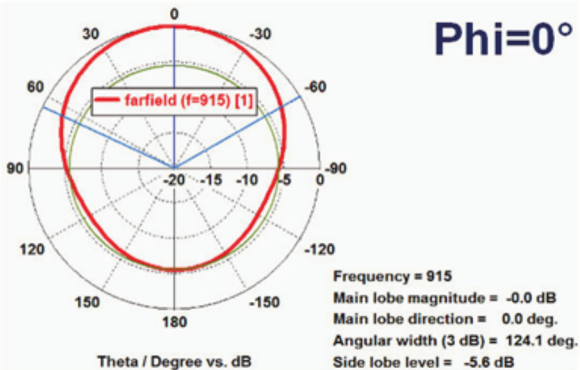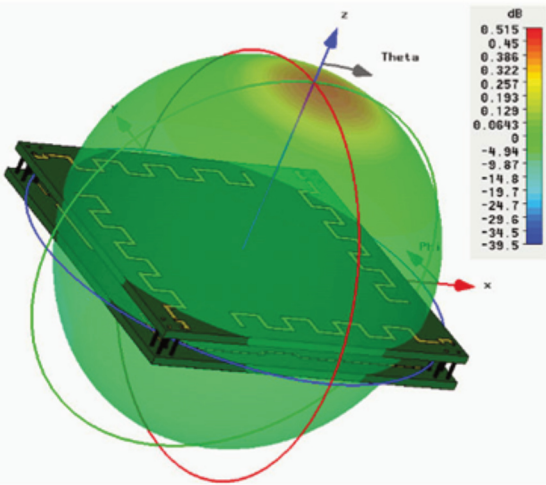

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



WANT020

Quad

Circular Polarized Quadrifilar Antenna (ETSI)

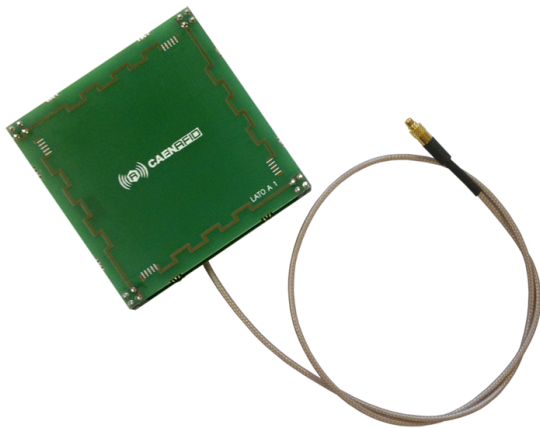

Overview

High performing quadrifilar, circular polarized RAIN RFID antenna in compact size. The **Quad** antenna is well suited to be integrated in long reading range portable devices.

The **Quad** antenna can be also used to implement compact fixed reading point with medium reading range capability.

Thanks to the circular polarization, the reading range is not affected by the tag orientation.

Features

- Designed for RAIN RFID portable and short/medium range applications
- Frequency Range 865.6÷867.6 MHz
- Gain 0.2 dBi
- Circular Polarization



Technical Specification Table

Frequency Range	865.6÷867.6 MHz (ETSI EN 302 208 v. 3.1.1)
Polarization	Right Hand Circularly Polarized (RHCP)
Gain	0.2 dBi typical
Axial Ratio	1 dB typical
VSWR	<1.5:1
Nominal Impedance	50 Ohm
Dimensions	<ul style="list-style-type: none">• (L) 60 x (W) 60 x (D) 9 mm³• 2.36 x 2.36 x 0.35 inches³
RF Connector	<ul style="list-style-type: none">• SMA plug male, straight (Mod. WANT020XASMA)• MMCX plug male, straight (Mod. WANT020XMMCX)• U.FL plug male, socket (Mod. WANT020XAUFL)• RP-TNC plug male, straight (Mod. WANT020XTNCR)
RF Cable	<ul style="list-style-type: none">• Diameter: 2.6 mm; Length: 50 cm (Mod. WANT020XASMA)• Diameter: 1.8 mm; Length: 40 cm (Mod. WANT020XMMCX)• Diameter: 1.4 mm; Length: 20 cm (Mod. WANT020XAUFL)• Diameter: 2.5 mm; Length: 100 cm (Mod. WANT020XTNCR)


Ordering Options

WANT020XASMA	Quad - SMA Connector - ETSI	WANT020XAUFL	Quad - U.FL Connector - ETSI
WANT020XMMCX	Quad - MMCX Connector - ETSI	WANT020XTNCRP	Quad - RP-TNC Connector - ETSI

Details

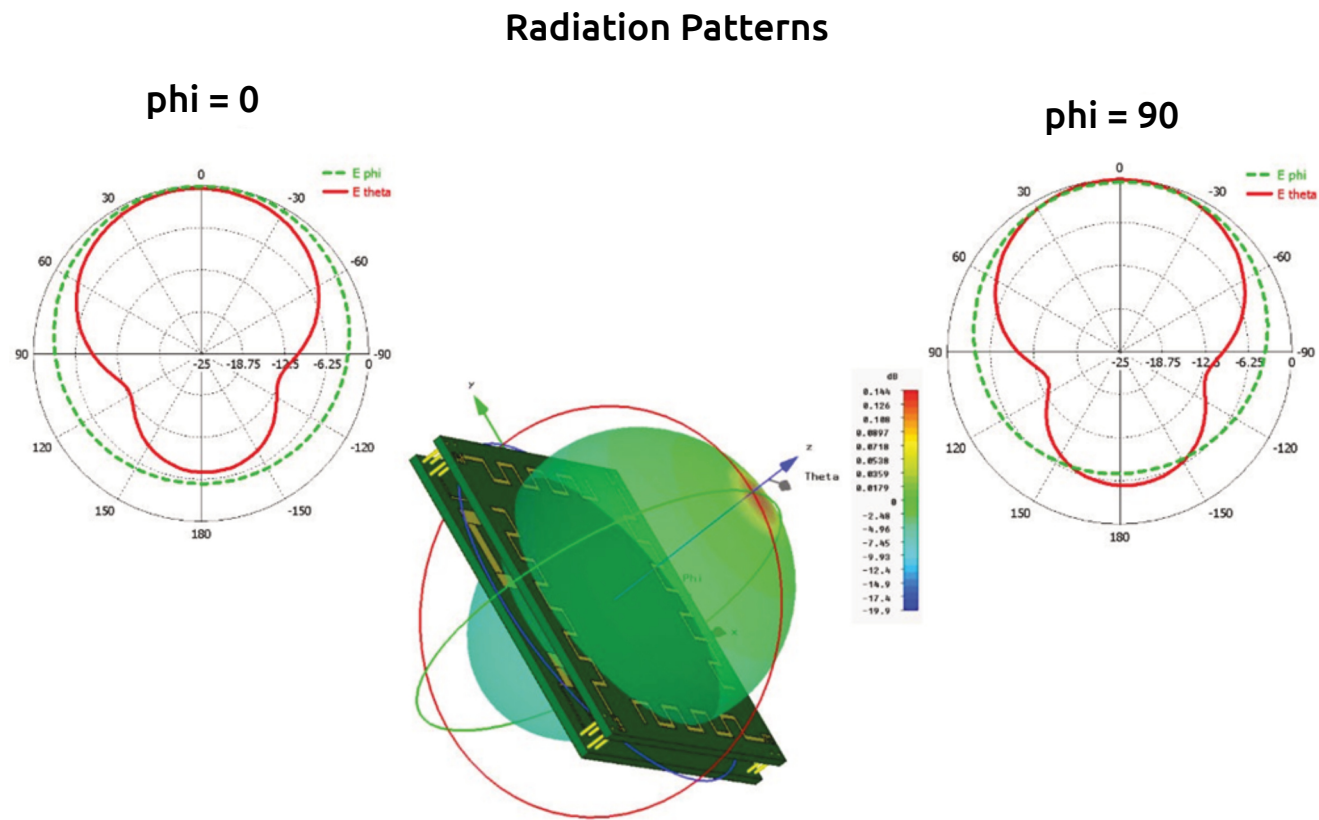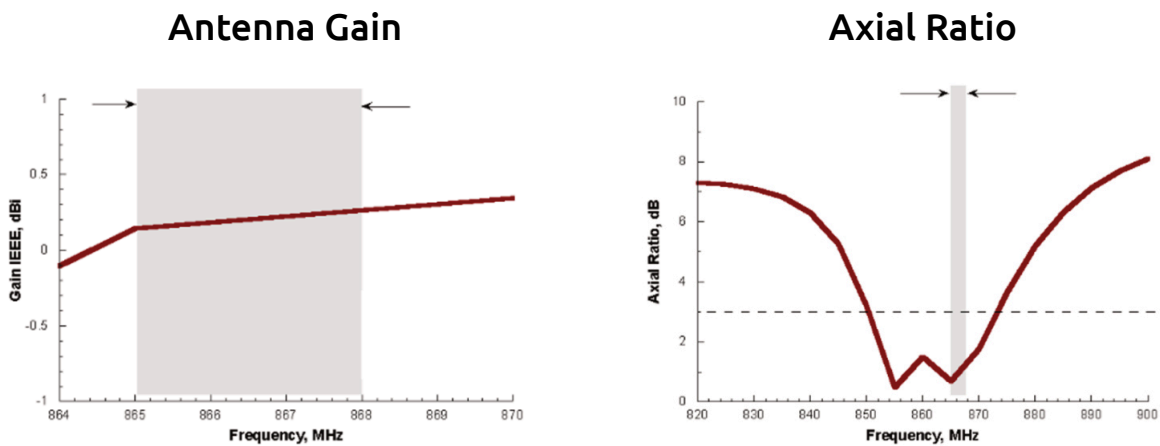

Mechanical Dimensions

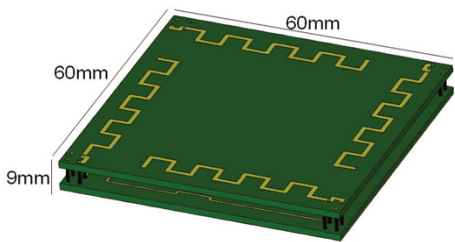

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.




CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



WANT021

Quad

Circular Polarized Quadrifilar Antenna (FCC)

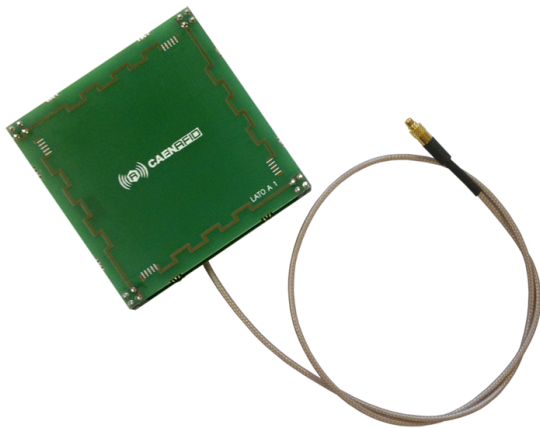

Overview

High performing quadrifilar, circular polarized RAIN RFID antenna in compact size. The **Quad** antenna is well suited to be integrated in long reading range portable devices.

The **Quad** antenna can be also used to implement compact fixed reading point with medium reading range capability.

Thanks to the circular polarization, the reading range is not affected by the tag orientation.

Features

- Designed for RAIN RFID long range applications
- Frequency Range 902÷928 MHz
- Gain 0.7 dBi
- Right Hand Circularly Polarized (RHCP)

Technical Specification Table


Frequency Range	902÷928 MHz (FCC part 15.247)
Polarization	Right Hand Circularly Polarized (RHCP)
Gain	0.7 dBi typical
Axial Ratio	1 dB typical
VSWR	<1.5:1
Nominal Impedance	50 Ohm
Dimensions	<ul style="list-style-type: none">• (L) 60 x (W) 60 x (D) 9 mm³• 2.36 x2.36 x 0.35 inches³
RF Connector	<ul style="list-style-type: none">• SMA plug male, straight (Mod. WANT021XASMA)• MMCX plug male, straight (Mod. WANT021XMMCX)• U.FL plug male, socket (Mod. WANT021XAUFL)• RP-TNC plug male, straight (Mod. WANT021XTNCR)
RF Cable	<ul style="list-style-type: none">• Diameter: 2.6 mm; Length: 50 cm (Mod. WANT021XASMA)• Diameter: 1.8 mm; Length: 40 cm (Mod. WANT021XMMCX)• Diameter: 1.4 mm; Length: 20 cm (Mod. WANT021XAUFL)• Diameter: 2.5 mm; Length:100 cm (Mod. WANT021XTNCR)

Ordering Options


WANT021XASMA	Quad - SMA Connector - FCC	WANT021XAUFL	Quad - U.FL Connector - FCC
WANT021XMMCX	Quad - MMCX Connector - FCC	WANT021XTNCRP	Quad - RP-TNC Connector - FCC

Details


Antenna Gain

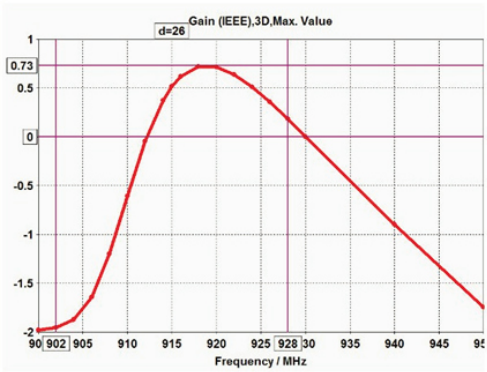


Axial Ratio

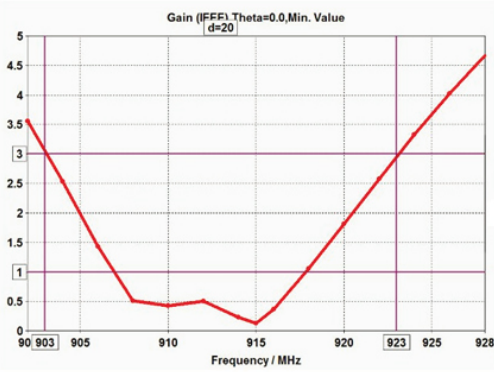

Radiation Patterns

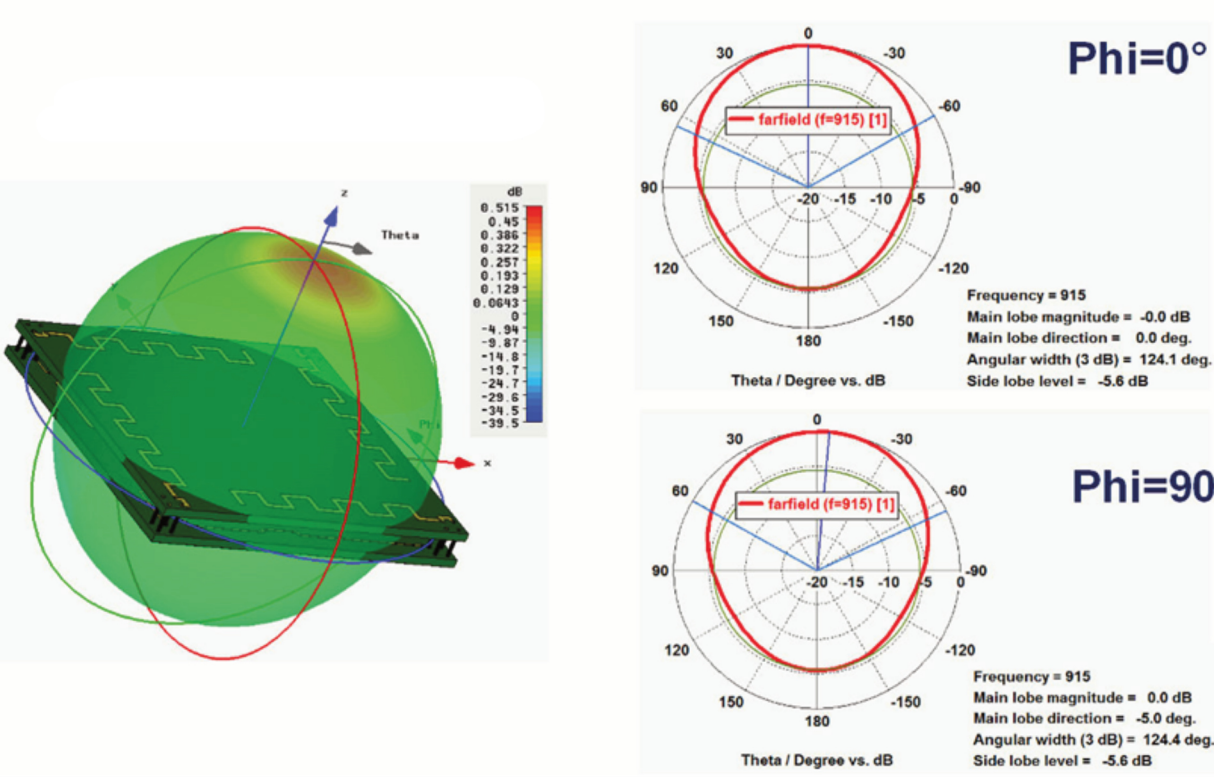

Mechanical Dimensions

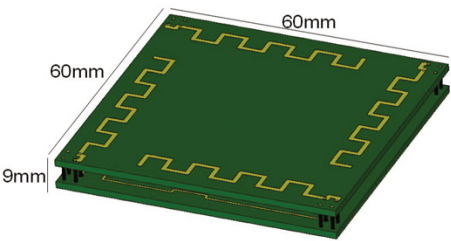

Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetràia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com



RA0003

RA0003

Antenna Multiplexer



Overview

The **RA0003** module is a 1 to 4 UHF antenna multiplexer that allows to increase the number of antenna ports of CAEN RFID readers. On single antenna readers (i.e. Quark or QuarkUp) it permits to implement low/medium range portals or other applications requiring up to 4 antennas. On 4 port readers it permits to implement smart shelves or other application requiring up to 16 antennas.

RA0003 has SMA RF connectors, is able to manage up to 2 W RF power and can be used in the whole range of UHF RFID worldwide band.

The module has an extended supply voltage range (9 V DC ÷ 36 V DC) and TTL level address signals.

Five LEDs provide the user with information about module operation.

Features

- 1 to 4 antenna multiplexer
- Covers the 860÷960 MHz freq. range
- 9V DC to 36 V DC supply voltage range
- SMA RF connectors
- TTL level address signals

Technical Specification Table

Frequency Range	860÷960 MHz
RF Port Impedance	50 Ohm
RF Power	Up to 2 W
Insertion Loss	1.5 dB typical
Return Loss	22 dB typical
Isolation	27 dB Typical
RF Connectors Type	SMA jack
Power Supply	<ul style="list-style-type: none">• 9 V DC ÷ 36 V DC• 350 mW max.
Control Voltage Range	9 V DC ÷ 36 V DC
User Interface	<ul style="list-style-type: none">• Green LED: power• Yellow LEDs: selected antenna information
Operating Temperature	-20 °C to +70 °C
IP Rating	IP30
Dimensions	<ul style="list-style-type: none">• (L) 65 x (W) 93 x (D) 35 mm³• 2.6 x 3.7 x 1.4 inches³
Weight	155 g

Ordering Options

WRA0003XAAAA	RA0003 - UHF Antenna Multiplexer		
--------------	----------------------------------	--	--



Copyright © CAEN RFID srl. All right reserved. Information in this publication supersedes all earlier versions. Specifications subject to change without notice.



CAEN RFID srl
via Vetraia, 11 - 55049 Viareggio (LU) - Italy
Phone +39 0584 388398 - Fax +39 0584 388959
www.caenrfid.com - info@caenrfid.com

This catalog, or parts thereof, may not be reproduced in any form or by any means without written permission from CAEN RFID srl.

CAEN RFID srl has publishing rights for all images reproduced in this catalog. Although every effort has been made to ensure the accuracy of information presented in this catalog, CAEN RFID srl reserves the right to modify its products specifications without giving any notice; for up-to-date information please visit www.caenrfid.com.

Java™ and all Java based trademarks and logos are trademarks or registered trademarks of Oracle America and/or its affiliates in the United States and other countries.

iPhone is a trademark of Apple Inc., registered in the U.S. and other countries. iPad is a trademark of Apple Inc.

Android™ is a trademark of Google Inc.

Windows is a registered trademark of Microsoft Corporation in the United States and other countries.

The Bluetooth® word mark and logos are owned by the Bluetooth SIG, Inc. and any use of such marks by CAEN RFID srl is under license. Other trademarks and trade names are those of their respective owners.

© CAEN RFID srl - 2025

Printed in Italy, January 2025



CAEN RFID S.r.l.

Via Vetràia 11
55049 Viareggio – Italy
Phone +39 0584 388 398
Fax +39 0584 388 959
info@caenrfid.com
www.caenrfid.com